


GLAZED PORCELAIN | FLOOR AND WALL TILES

STONE COLOUR PATTERN ABSOLUTE



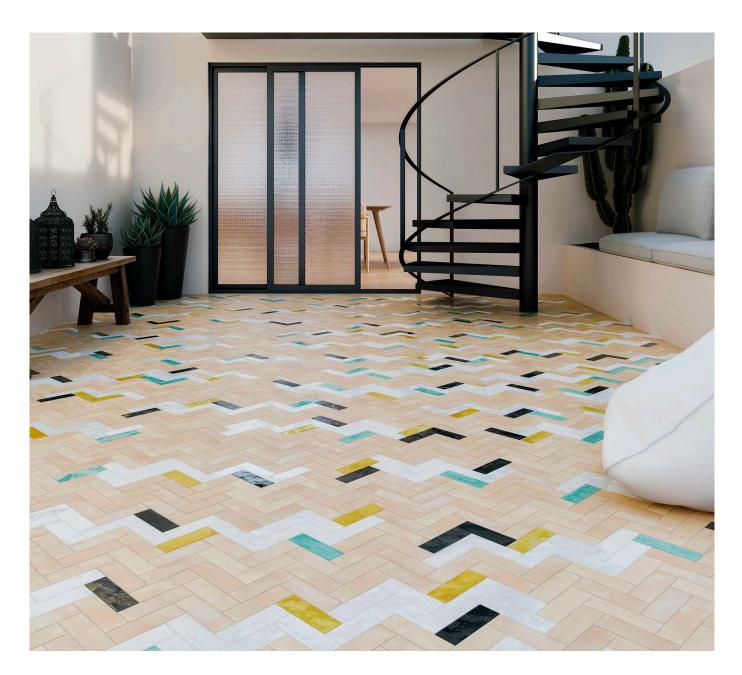


f X O J P in ► www.johnson-tiles.com © 2024-25 Johnson Tiles Limited






S FIFTEEN COLOURS ☐ TWO SIZES ☐ TWO FINISHES

Influenced by Moroccan tiles, Tuscany exhibits a traditional terracotta aesthetic. The base of the colour palette is formed by the earthy tones of Tan and Biscuit with these warm neutrals offering a soothing, nature-inspired look, ideal for creating an interior that pays homage to the cottagecore trend. The collection also features the striking, bold tones of Lemon, Pistachio, Coral, Azure and Olive to add a sense of contemporary vibrance.

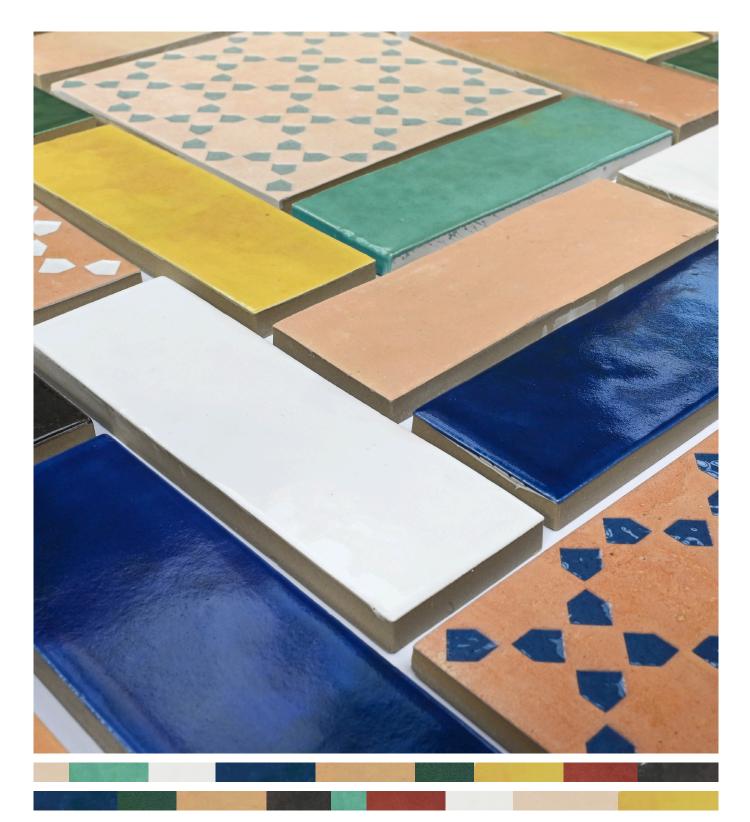

www.johnson-tiles.com

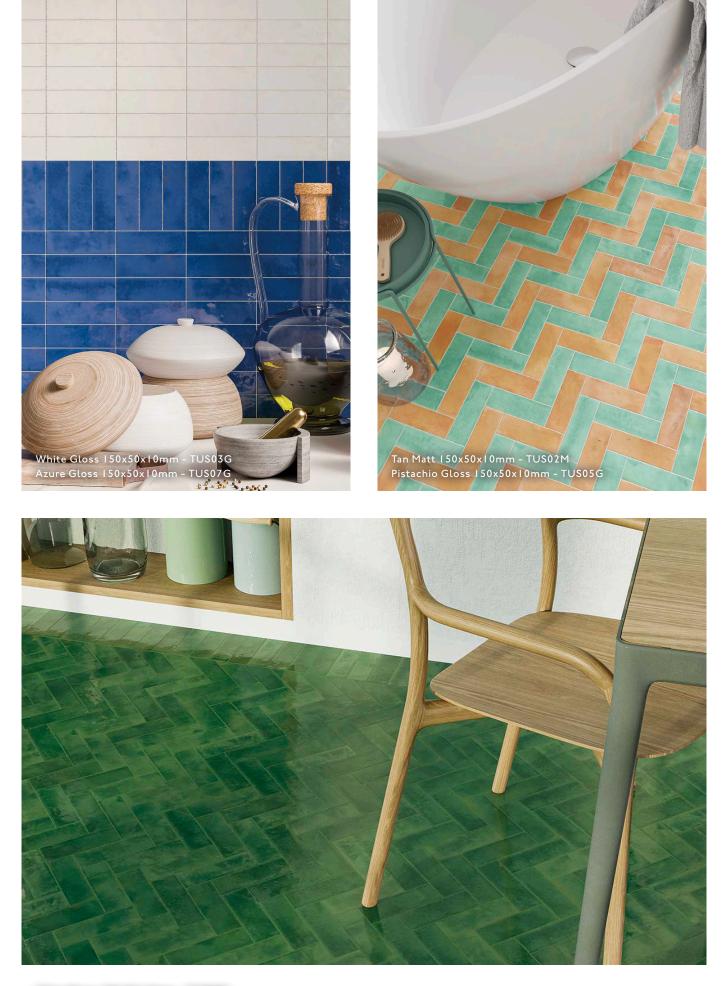

Olive Gloss 150x50x10mm - TUS08G







# COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation





WHITE PEI: IV LRV: 74 Product Code: G TUS03G

LEMON PEI: III LRV: 47 Product Code: G TUS04G



PEI: III LRV: 31 Product Code: G TUS05G



CORAL PEI: II LRV: 18 Product Code: G TUS06G



AZURE PEI: II LRV: II Product Code: G TUS07G



OLIVE PEI: II [LRV: 13] Product Code: G TUS08G



EBONY PEI: II LRV: 08 Product Code: G TUS09G



BISCUIT PEI: III LRV: 46 Product Code: M TUSOIM




TAN PEI: III (LRV: 43) Product Code: M TUS02M

## COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation




BISCUIT / WHITE - DÉCOR (PEI: III) Product Code: M TUS I MD




BISCUIT / AZURE - DÉCOR PEI: III Product Code: M TUS2MD



BISCUIT / PISTACHIO - DÉCOR PEI: III Product Code: M TUS3MD



TAN / WHITE - DÉCOR (PEI: III) Product Code: M TUS4MD




TAN / AZURE - DÉCOR PEI: III Product Code: M TUS5MD



TAN / OLIVE - DÉCOR PEI: III Product Code: M TUS6MD


## SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

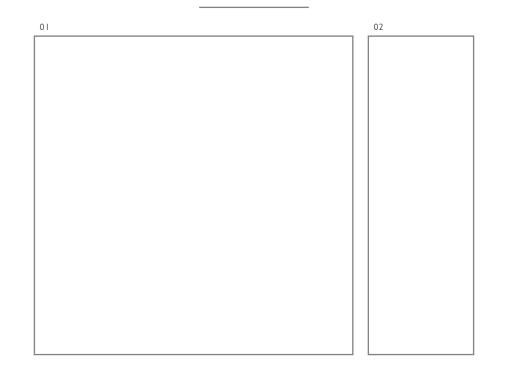

#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M² / Box	Kg / Box
01	150x150mm	l0mm	G Gloss	White Only	Bla	22 Tiles	0.48 m²	10.39 kg
			M Matt	Biscuit, Tan and All Décor Colours	Bla	22 Tiles	0.48 m²	10.39 kg
02	150x75mm	l 0mm	G Gloss	White, Lemon, Coral, Pistachio, Azure, Olive and Ebony Only	Bla	66 Tiles	0.46 m²	10.35 kg
			M Matt	Biscuit and Tan Only	Bla	66 Tiles	0.46 m²	10.35 kg

Note: Glazed Porcelain / Bla tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.

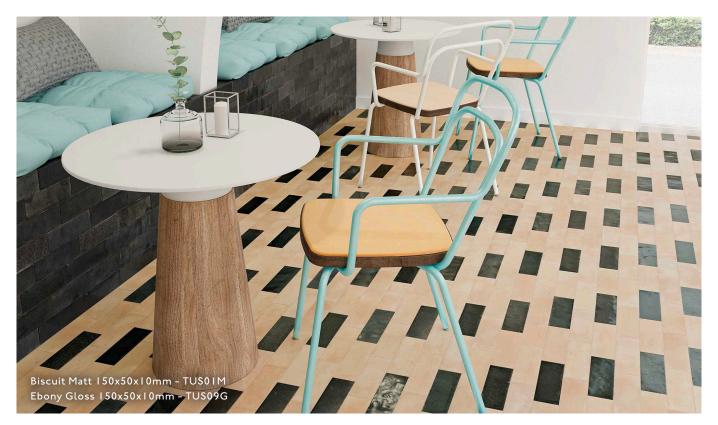

### **TECHNICAL SUPPORT**

#### Specification, Sustainability and Important Information

#### **Product Specification**

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Tuesenu	G Gloss	Internal and External	Internal Only	-	Glazed Porcelain / Bla
Tuscany	M Matt	Internal and External	Internal Only	-	Glazed Porcelain / Bla

#### **Floor Values**

Finish	Colour	PTV (96)	PTV (55)	R Value	Wet Ramp	PEI	Traffic
G Gloss	White Only	Wet 0 - 24	-	-	-	IV	Commercial
	Lemon and Pistachio Only	Wet 0 - 24	-	-	-	Ш	Light Commercial
	Coral, Azure, Olive and Ebony Only	Wet 0 - 24	-	-	-	П	Domestic
M Matt	Biscuit and Tan Only	Wet 25 - 35	-	R I 0	-	Ш	Light Commercial
	All Décor Colours Only	Wet 25 - 35	-	-	-	111	Light Commercial

#### Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	∣ Test and Standard	Requirement	Result
Length / Width EN ISO 10545-2	± 0.6% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545-4	Min. 35N / mm²	Pass
Thickness EN ISO 10545-2	± 5% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545-9	Pass	Pass
Straightness of Side EN ISO 10545-2	± 0.5% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545-12	Resistant	Resistant
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
JeanSurface Flatness↑↑↑EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
Water Absorption EN ISO 10545-3	≤ 0.5%	Pass	Fire Rating		Class A I FL Non Combustible

#### Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Tuscany	Glazed Porcelain / Bla	Yes	Up to 60%	Up to 100% (Boxes Only)

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All floor tiles shown in this literature achieve a PTV (96) Dry 36+ test result. PTV (96): Pendulum Test Value - 4S. PTV (55): Pendulum Test Value - TRL. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

#### Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0) 1782 524 | | | or email: technical@johnson-tiles.com.

### WHERE TO FIND US

#### Head Office

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ, United Kingdom

Tel: +44 (0) I 782 575 575 Email: info@johnson-tiles.com www.johnson-tiles.com

#### Material Lab Studio

10 Great Titchfield Street, London, WIW 8BB, United Kingdom

Tel: +44 (0)20 7436 8629 Email: info@material-lab.co.uk www.material-lab.co.uk

#### Factory Outlet

Tel: +44 (0)1782 524 040 Email: foutlet@johnson-tiles.com www.outlet.johnson-tiles.com

#### **Customer Services**

Tel: +44 (0) 1782 524 000 Email: sales@johnson-tiles.com 8:30am - 4:30pm (Monday - Friday)

Order A Sample Tel: +44 (0)1782 524 043 Email: samples@johnson-tiles.com

Technical Advice Helpline Tel: +44 (0)1782 524 111 Email: technical@johnson-tiles.com

Updated: February 2025

