

KENSINGTON

GLAZED CERAMIC | WALL TILES

COLOUR STRUCTURE SELECT



www.johnson-tiles.com

© 2024 Johnson Tiles Limited

Est. 1901
**JOHNSON
TILES**

KENSINGTON

 **TEN COLOURS**

 **THREE SIZES**

 **ONE FINISH**

Kensington is a stylish collection of rustic slim-format ceramic wall tiles. With a handcrafted effect, Kensington offers a cool colour palette exploring sea tones and fresh neutrals, with available colours ranging from wintry Snow to inky Coal and soft Sage. Experiment with Chalk, Storm, and Smoke for a colour graded tonal grey design.





COLOURS AND PRODUCT CODES

VI: Low Shade Variation



CHALK - RUSTIC LRV: 74

Product Code:  KEN01A




SNOW - RUSTIC LRV: 86

Product Code:  KEN09A




CREAM - RUSTIC LRV: 76

Product Code:  KEN03A

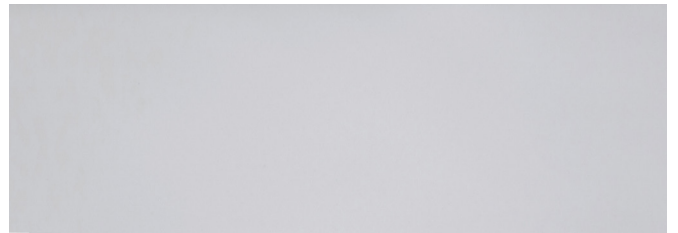


CLOUD - RUSTIC LRV: 63

Product Code:  KEN09A

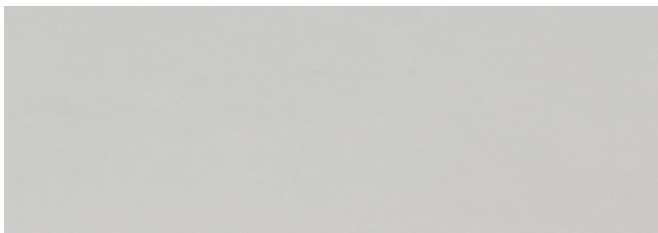


STORM - RUSTIC LRV: 53

Product Code:  KEN04A

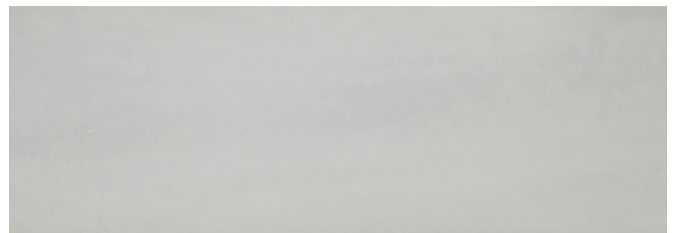

NUDE - RUSTIC LRV: 56

Product Code:  KEN11A

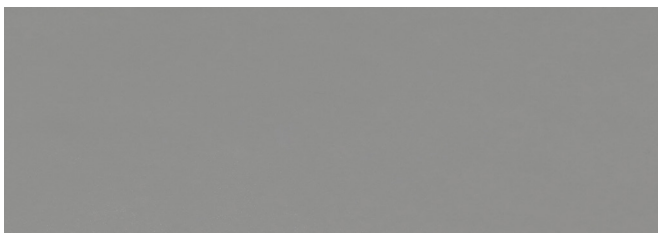


SMOKE - RUSTIC LRV: 32

Product Code:  KEN05A




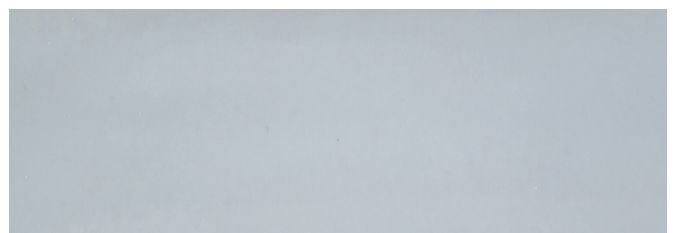
SAGE - RUSTIC LRV: 42

Product Code:  KEN12A

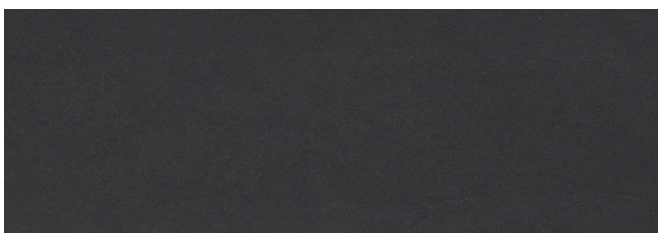

COAL - RUSTIC LRV: 08

Product Code:  KEN08A




DUCK EGG - RUSTIC LRV: 55

Product Code:  KEN13A

SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

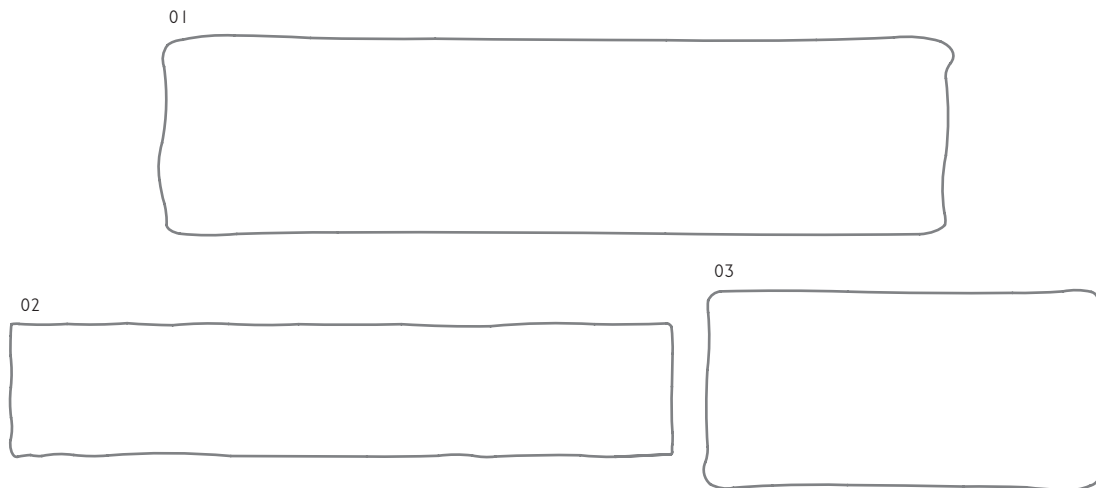

#	Size Format	Thickness	Finish	Structure	Availability	Class	Pcs / Box	M ² / Box	Kg / Box
01	300x75mm	10mm	Gloss	Rustic	Chalk, Cream, Storm, Smoke and Coal Only	BIII	19 Tiles	0.43 m ²	6.98 kg
02	250x50mm	10mm	Gloss	Rustic	Snow, Cloud, Nude, Sage and Duck Egg Only	BIII	48 Tiles	0.60 m ²	9.93 kg
03	150x75mm	10mm	Gloss	Rustic	Chalk and Cream Only	BIII	19 Tiles	0.43 m ²	6.98 kg


Note: Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.















TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Kensington	 Gloss	Internal Only	-	-	Glazed Ceramic / BIII

Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 15N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	-	Not Suitable
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	10% to 20%	Pass	 Fire Rating		Class A I Non Combustible

Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Kensington	Glazed Ceramic / BIII	Yes	Up to 80%	-

Note: Please contact our technical helpline, or visit our website for specification and installation advice.
EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: technical@johnson-tiles.com.

WHERE TO FIND US

Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com
8:30am - 4:30pm (Monday - Friday)

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0)1782 524 111
Email: technical@johnson-tiles.com

Updated: October 2024



www.johnson-tiles.com | [f](#) [X](#) [G](#) [d](#) [P](#) [in](#) [v](#)

© 2024 Johnson Tiles Limited