

DANUBE

GLAZED PORCELAIN | FLOOR AND WALL TILES

STONE SPECKLE ABSOLUTE



www.johnson-tiles.com

© 2024 Johnson Tiles Limited



DANUBE



SEVEN COLOURS




TWO SIZES



THREE FINISHES


This terrazzo effect glazed porcelain range replicates the real thing, with an eye-catching speckled effect suitable for both wall and floor applications. Available in seven striking colours; try the Blue, Coral and Green for a pop of colour or the muted tones of White, Beige, Grey or Anthracite for a timeless design statement. Our Danube range is the full package with co-ordinating skirting tiles also offered, and a Grip+ 2cm option available in White, Beige and Grey, allowing tiling to be carried through from indoor to outdoor, to create an engaging and seamless look.






COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

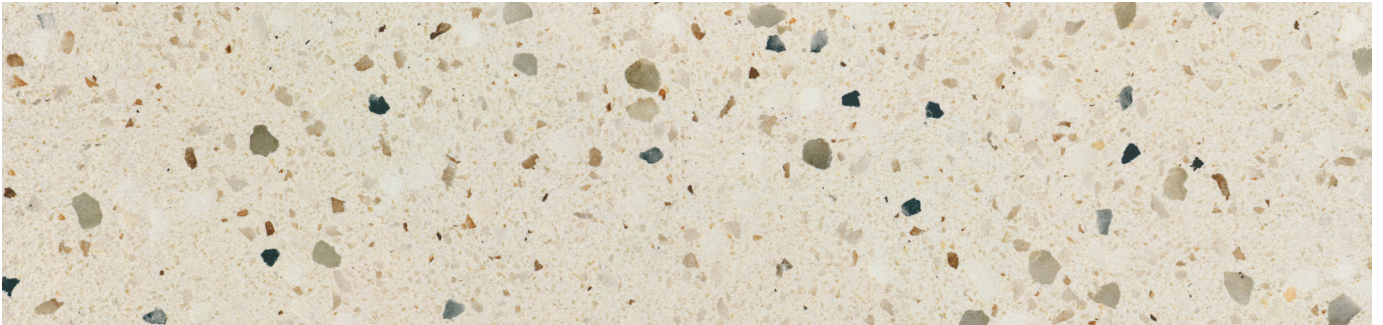


WHITE PEI: IV LRV: 55

Product Code: N DAN01N + L DAN01L + E DAN01E | Fitting Code: N DAN1NS + L DAN1LS

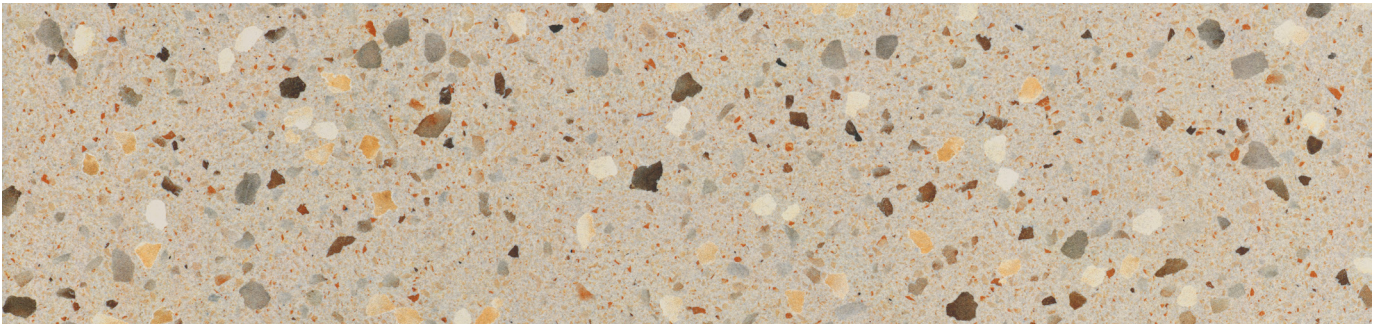


BEIGE PEI: IV LRV: 42

Product Code: N DAN02N + L DAN02L + E DAN02E | Fitting Code: N DAN2NS + L DAN2LS

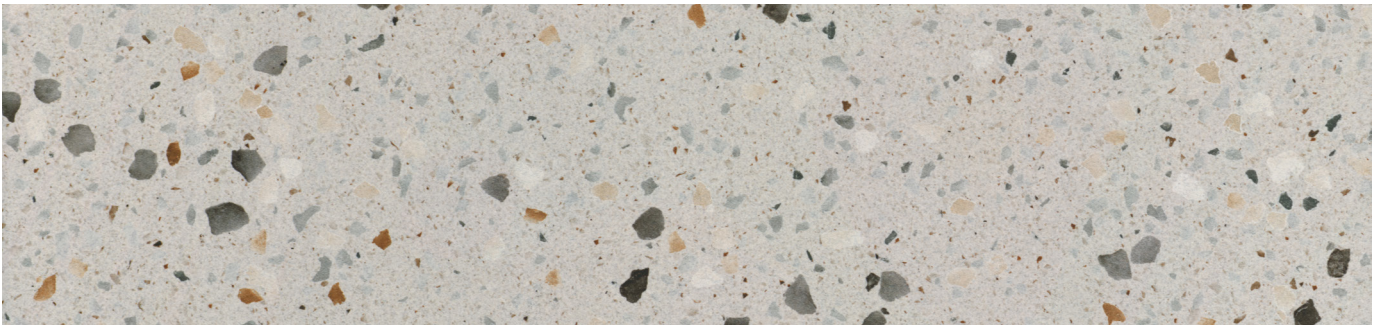

GREY PEI: IV LRV: 39

Product Code: N DAN03N + L DAN03L + E DAN03E | Fitting Code: N DAN3NS + L DAN3LS

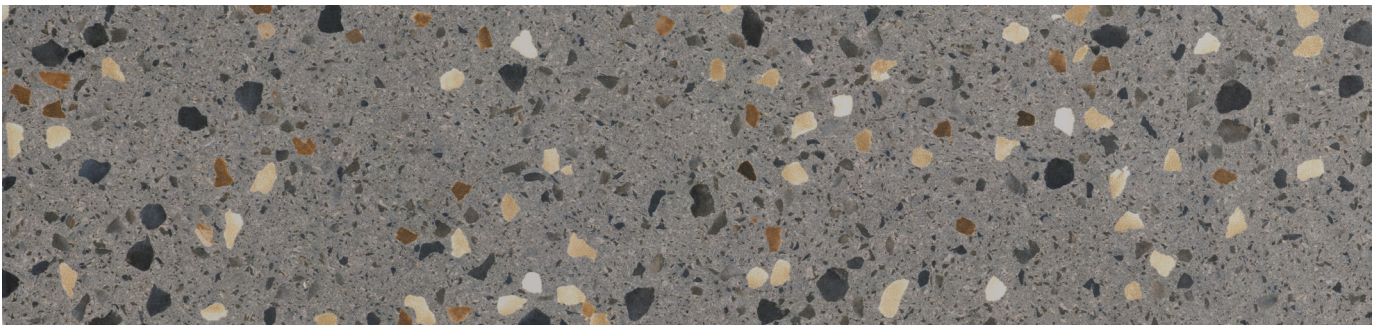


ANTHRACITE PEI: III LRV: 16

Product Code: N DAN04N + L DAN04L | Fitting Code: N DAN4NS + L DAN4LS

COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

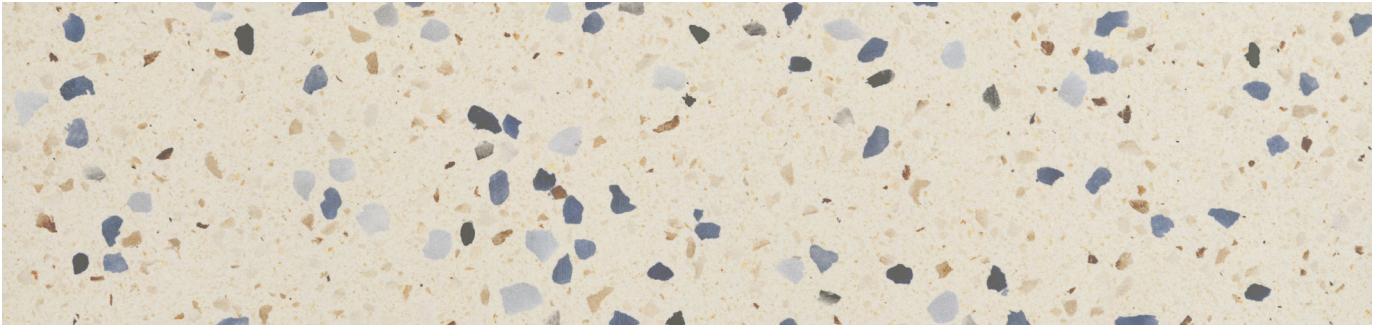


BLUE PEI: IV LRV: 53

Product Code: N DAN05N + L DAN05L | Fitting Code: N DAN5NS + L DAN5LS



CORAL PEI: IV LRV: 53

Product Code: N DAN06N + L DAN06L | Fitting Code: N DAN6NS + L DAN6LS

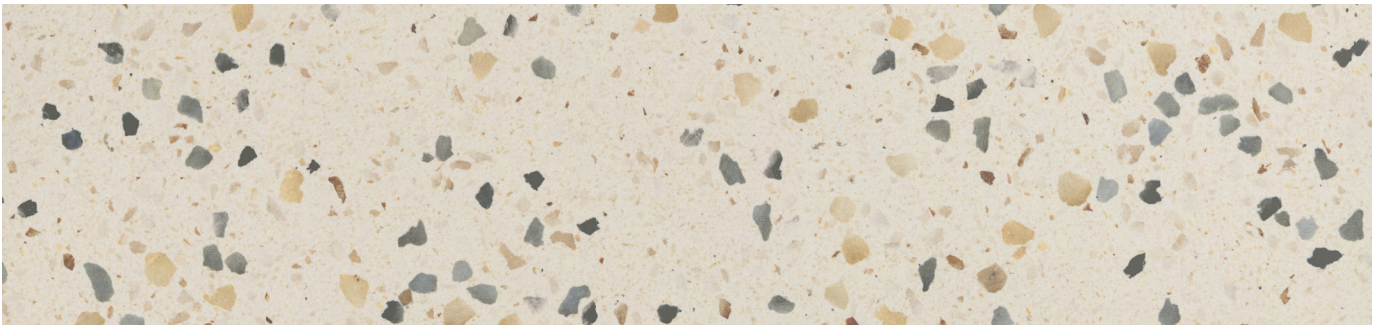

GREEN PEI: IV LRV: 53


Product Code: N DAN07N + L DAN07L | Fitting Code: N DAN7NS + L DAN7LS



Anthracite Natural 592x592x10.5mm - DAN04N

SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

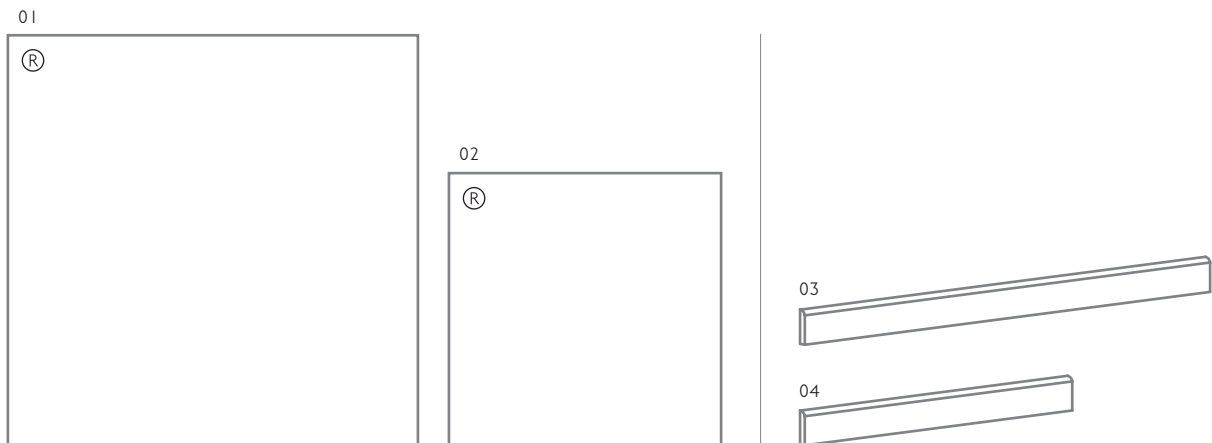

#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M ² / Box	Kg / Box
01	889x889mm	10.5mm	Lapato	All Colours Shown	Bla	1 Tile	0.79 m ²	19.40 kg
02	592x592mm	10.5mm	Natural	All Colours Shown	Bla	3 Tiles	1.07 m ²	24.40 kg
			Lapato	All Colours Shown	Bla	3 Tiles	1.07 m ²	24.40 kg
		20mm	Grip+ 2cm	White, Beige and Grey Only	Bla	2 Tiles	0.71 m ²	32.00 kg

#	Fittings	Thickness	Finish	Availability	Class	Pcs / Box	Lm / Box	Kg / Box
03	889x75mm R/T Skirting	10.5mm	Lapato	All Colours Shown	Bla	3 Tiles	11.56 lm	21.19 kg
04	592x95mm R/T Skirting	10.5mm	Natural	All Colours Shown	Bla	18 Tiles	10.66 lm	24.84 kg
			Lapato	All Colours Shown	Bla	18 Tiles	10.66 lm	24.84 kg

Note: Glazed Porcelain / Bla tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com. (R) Rectified Edge.






Corat Lapato 889x889x10.5mm - DAN06L




TECHNICAL SUPPORT

Specification, Sustainability and Important Information













Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Danube	 Natural	Internal and External	Internal Only	-	Glazed Porcelain / Bla
	 Lapato	Internal and External	Internal Only	-	Glazed Porcelain / Bla
	 Grip+ 2cm	-	Internal and External	Yes	Glazed Porcelain / Bla

Floor Values

Finish	Colour	PTV (96)	PTV (55)	R Value	Wet Ramp	PEI	Traffic
 Natural	Anthracite Only	Wet 36+	-	R 10	A	III	Light Commercial
	All Other Colours	Wet 36+	-	R 10	A	IV	Commercial
 Lapato	Anthracite Only	Wet 0 - 24	-	-	-	III	Light Commercial
	All Other Colours	Wet 0 - 24	-	-	-	IV	Commercial
 Grip+ 2cm	White, Beige and Grey Only	Wet 36+	Wet 36+	R 12	C	IV	Commercial

Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 35N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	Resistant	Resistant
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	$\leq 0.5\%$	Pass	 Fire Rating		Class A I FL Non Combustible

Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Danube	Glazed Porcelain / Bla	Yes	Up to 10%	Up to 100% (Boxes Only)

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All floor tiles shown in this literature achieve a PTV (96) Dry 36+ test result. PTV (96): Pendulum Test Value - 4S. PTV (55): Pendulum Test Value - TRL. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: technical@johnson-tiles.com.

WHERE TO FIND US

Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com
8:30am - 4:30pm (Monday - Friday)

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0)1782 524 111
Email: technical@johnson-tiles.com

Updated: October 2024



www.johnson-tiles.com | [f](#) [X](#) [G](#) [d](#) [P](#) [in](#) [v](#)

© 2024 Johnson Tiles Limited