


GLAZED CERAMIC | WALL TILES

COLOUR SHAPE ABSOLUTE





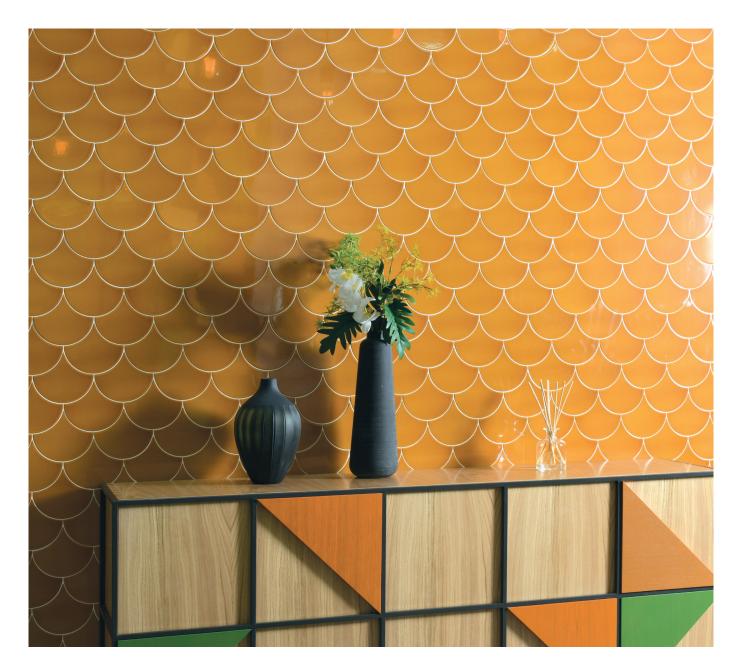




# SYMMETRY

♦ TWELVE COLOURS ONE SIZE

ONE FINISH

Symmetry explores shape with a distinctive scale format. Featuring twelve gloss colours, varying from wintry White to vibrant Flame and blood red Raspberry, Symmetry offers both neutral and vivid tones. The colour palette pairs with the unique scale shape to make this range a striking choice. Try combining shades of Zinc, Harebell, and Cloud for an oceanic effect.



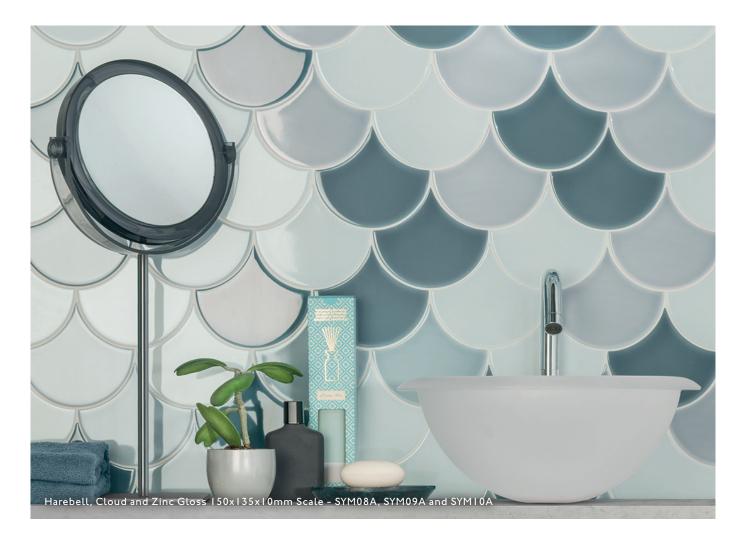



# COLOURS AND PRODUCT CODES

VI: Low Shade Variation



WHITE LRV: 86 Product Code: G SYM01A



RASPBERRY LRV: 08 Product Code: G SYM04A



CREAM LRV: 80 Product Code: G SYM02A



JADE LRV: 16 Product Code: G SYM05A



FLAMELRV: 18Product Code:G SYM03A



LEAF [LRV: 10] Product Code: G SYM06A



STORMLRV: 50Product Code:G SYM07A



ZINC [LRV: 19] Product Code: G SYM10A



HAREBELLLRV: 73Product Code:GSYM08A



MIDNIGHTLRV: 06Product Code:GSYMIIA




CLOUD LRV: 19 Product Code: G SYM09A



BLACK LRV: 04 Product Code: G SYMI2A

# SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

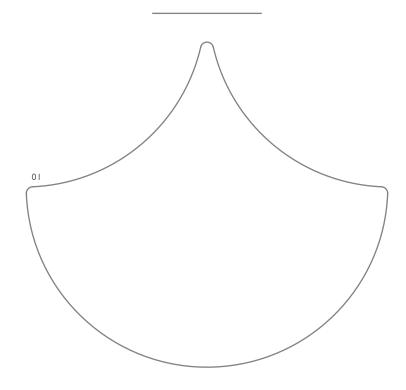

#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M² / Box	Kg / Box
01	150x135mm Scale	I0mm	G Gloss	All Colours Shown	BIII	I 4 Tiles	0.154 m²	2.72 kg

Note: Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.



# **TECHNICAL SUPPORT**

## Specification, Sustainability and Important Information

#### **Product Specification**

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Symmetry	G Gloss	Internal Only	-	-	Glazed Ceramic / BIII

### Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
Length / Width EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545-4	Min. I 5N / mm²	Pass
Thickness EN ISO 10545-2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545-9	Pass	Pass
Straightness of Side EN ISO 10545-2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO 10545-12	-	Not Suitable
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
→ Surface Flatness EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
Water Absorption EN ISO 10545-3	10% to 20%	Pass	Fire Rating		Class A I Non Combustible

# Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Symmetry	Glazed Ceramic / BIII	Yes	Up to 20%	Up to 100% (Boxes Only)

Note: Please contact our technical helpline, or visit our website for specification and installation advice. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

## Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0) 1782 524 | | | or email: technical@johnson-tiles.com.

# WHERE TO FIND US

#### Head Office

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ, United Kingdom

Tel: +44 (0) I 782 575 575 Email: info@johnson-tiles.com www.johnson-tiles.com

## Material Lab Studio

10 Great Titchfield Street, London, WIW 8BB, United Kingdom

Tel: +44 (0)20 7436 8629 Email: info@material-lab.co.uk www.material-lab.co.uk

## Factory Outlet

Tel: +44 (0)1782 524 040 Email: foutlet@johnson-tiles.com www.outlet.johnson-tiles.com

#### **Customer Services**

Tel: +44 (0) 1782 524 000 Email: sales@johnson-tiles.com 8:30am - 4:30pm (Monday - Friday)

Order A Sample Tel: +44 (0)1782 524 043 Email: samples@johnson-tiles.com

Technical Advice Helpline Tel: +44 (0)1782 524 111 Email: technical@johnson-tiles.com

Updated: February 2025

