

# ARIZONA

GLAZED CERAMIC | WALL TILES

MARBLE

SELECT



[www.johnson-tiles.com](http://www.johnson-tiles.com)

© 2024-25 Johnson Tiles Limited

Est. 1901  
**JOHNSON**  
**TILES**

# ARIZONA



THREE COLOURS



ONE SIZE



ONE FINISH

Arizona offers a timeless colour palette perfect for both residential and commercial applications, with Quartz, Opal and Sapphire to choose from. This compact collection of glazed ceramic wall tiles features a single versatile size-format of 600x300mm and a luxurious gloss finish. Arizona offers an onyx marble effect look, to bring a touch of natural inspiration that can easily be paired with a variety of floor colours and textures, to compliment any style or space.








Quartz Gloss 600x300x8.6mm - ARIZIA  
with Portland Basalt Natural 600x300x10mm - POR04N



## Colours & Product Codes


V3: Moderate to High Shade Variation

---

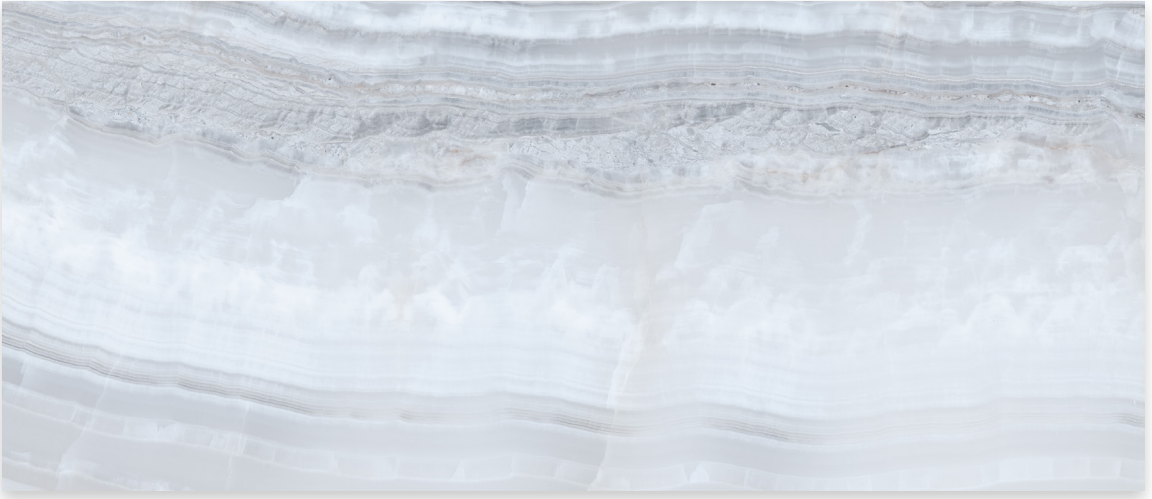


**QUARTZ** (LRV: 65)

Product Code: (G) ARIZIA

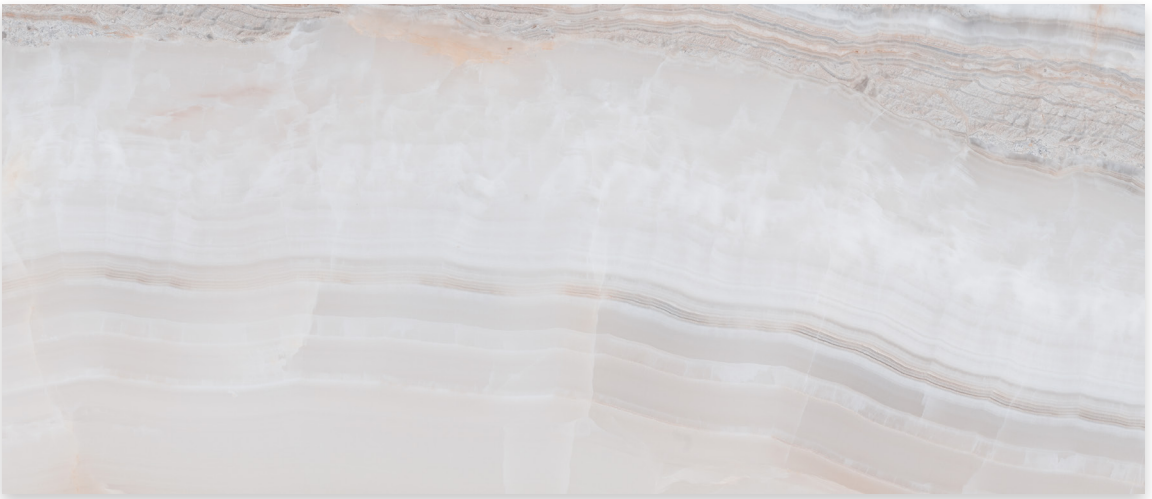

**OPAL** (LRV: 60)

Product Code: (G) ARIZZA

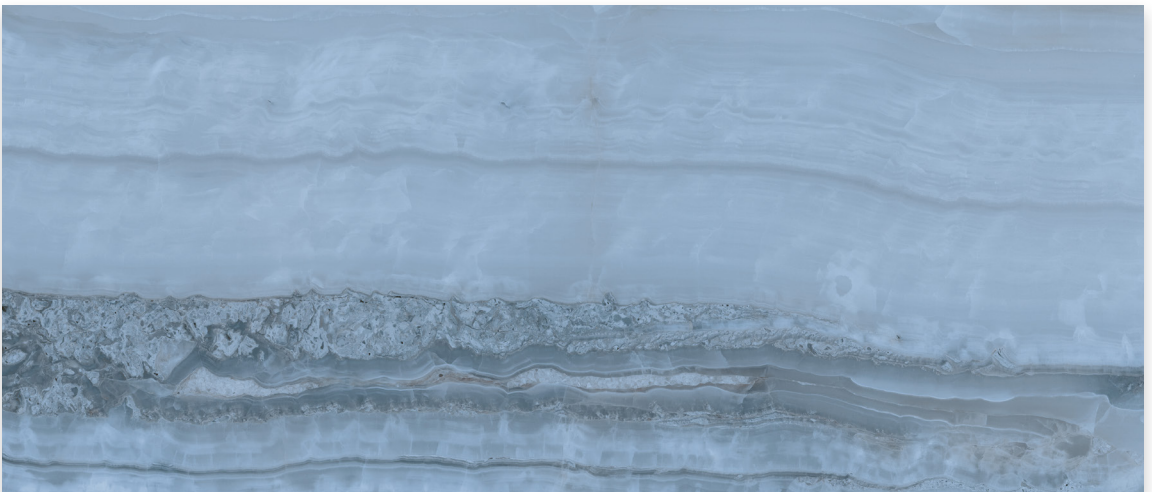

**SAPPHIRE** (LRV: 39)


Product Code: (G) ARIZ3A





## Size Formats

Sizing & Packing Information



#	Size	Thickness	Finish	Colour	Structure	Class	Pcs / Box	M2 / Box	Kg / Box
1	600x300mm	8.6mm	Gloss	All Colours	-	BIII	6 Tiles	1.08 m <sup>2</sup>	18.00 kg

**Note:** Glazed Ceramic / BIII and Glazed Porcelain / BIIa tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com). (R) Rectified Edge.





## Technical, Sustainability & Important Information

### Specification

Range	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material / Class
Arizona	Gloss	Internal Only	-	-	V3	Glazed Ceramic [BIII]

### Physical Properties

Test & Standard	Requirement	Test Result	Test & Standard	Requirement	Test Result
<b>Length / Width</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	<b>Modulus of Rupture</b> EN ISO 10545 - 4	Min. 15N / mm <sup>2</sup>	Pass
<b>Thickness</b> EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	<b>Thermal Shock</b> EN ISO 10545 - 9	Pass	Pass
<b>Straightness of Side</b> EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	<b>Frost Resistance</b> EN ISO 10545 - 12	-	Not Suitable
<b>Rectangularity</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	<b>Chemical Resistance</b> EN ISO 10545 - 13	Min. Class B	Pass
<b>Surface Flatness</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	<b>Stain Resistance</b> EN ISO 10545 - 14	Min. Class 3	Pass
<b>Water Absorption</b> EN ISO 10545 - 3	10% to 20%	Pass	<b>Fire Rating</b>	-	Class A I Non Combustible
<b>Weight / M<sup>2</sup></b>	16.67kg 8.6mm thick				

### Sustainability Information

Range	Material / Class	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Arizona	Glazed Ceramic [BIII]		Up to 40%	Up to 100%	Up to 100%

**Note:** Please contact our Technical Advice Helpline for specification and installation advice. All Glazed Ceramic [BIII] products shown in this overview conform to BS EN 14411. CSV: Colour Shade Variation. EPD: Environmental Product Declaration. For a full company sustainability overview please visit [www.johnson-tiles.com/about/sustainability](http://www.johnson-tiles.com/about/sustainability).

### Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com)

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: [technical@johnson-tiles.com](mailto:technical@johnson-tiles.com).

## WHERE TO FIND US

### Head Office

Harewood Street, Tunstall,  
Stoke on Trent, Staffordshire,  
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)  
[www.johnson-tiles.com](http://www.johnson-tiles.com)

---

### Material Lab Studio

10 Great Titchfield Street,  
London, W1W 8BB,  
United Kingdom

Tel: +44 (0)20 7436 8629  
Email: [info@material-lab.co.uk](mailto:info@material-lab.co.uk)  
[www.material-lab.co.uk](http://www.material-lab.co.uk)

---

### Factory Outlet

Tel: +44 (0)1782 524 040  
Email: [foutlet@johnson-tiles.com](mailto:foutlet@johnson-tiles.com)  
[www.outlet.johnson-tiles.com](http://www.outlet.johnson-tiles.com)

---

### Customer Services

Tel: +44 (0)1782 524 000  
Email: [sales@johnson-tiles.com](mailto:sales@johnson-tiles.com)  
8:30am - 4:30pm (Monday - Friday)

---

### Order A Sample

Tel: +44 (0)1782 524 043  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

### Technical Advice Helpline

Tel: +44 (0)1782 524 111  
Email: [technical@johnson-tiles.com](mailto:technical@johnson-tiles.com)

---

Updated: March 2025

