

GLADEMOOR

GLAZED PORCELAIN AND CERAMIC | FLOOR AND WALL TILES

STONE STRUCTURE MOSAIC SELECT



www.johnson-tiles.com

© 2024 Johnson Tiles Limited

Est. 1901
**JOHNSON
TILES**


GLADEMOOR

 FIVE COLOURS

 SIX SIZES

 FIVE FINISHES

Replicating natural materials, Glademoor takes direction from the interiors trend for earth tones with five colours of Stone, Sand, Flint, Coal, and Bone. Glademoor also features two mixed décor options which combine hues from across the colour palette to create a stylish focal point for added detail and surface interest, whilst the weave structured design delivers a stunning statement to combine seamlessly with the field tiles. The Grip and Grip+ finishes both provide a PTV slip resistance rating of 36+ to add to the versatility of this range.

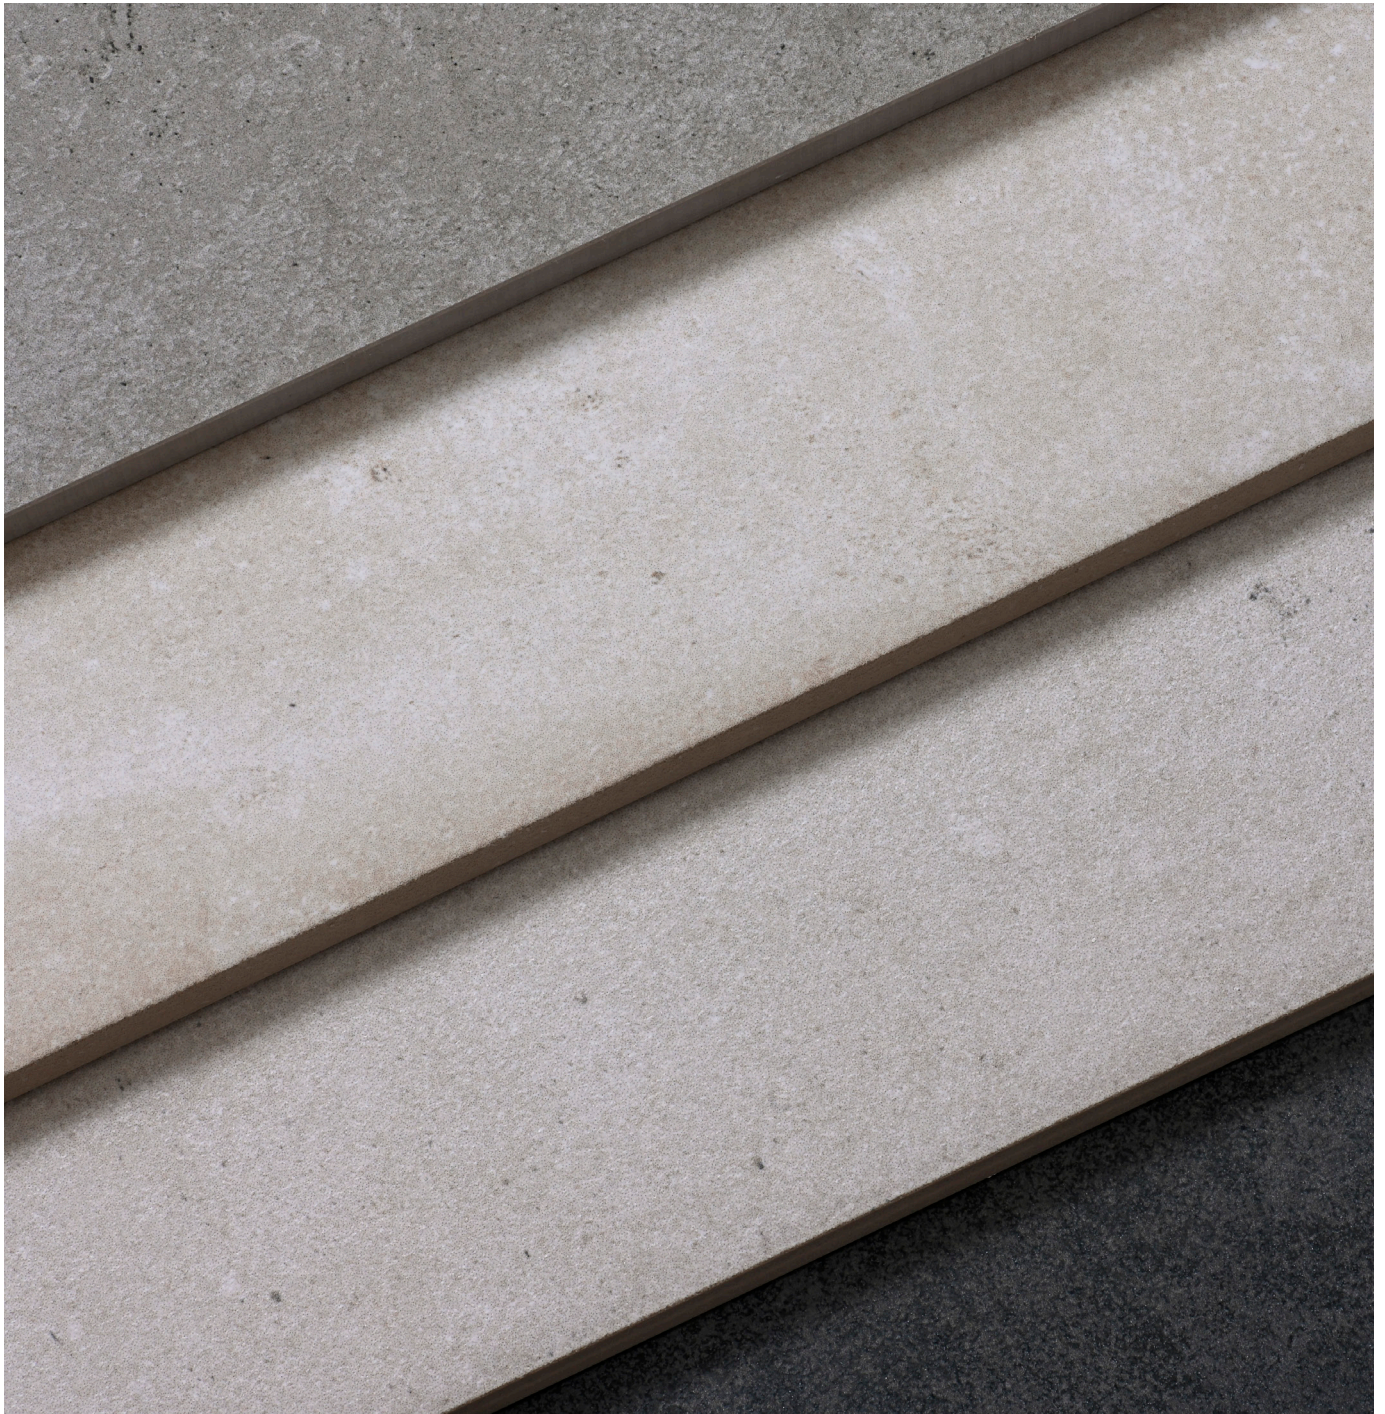



COLOURS AND PRODUCT CODES


V3: Moderate to High Shade Variation



BONE PEI: IV LRV: 86

Product Code (Bla): N GLA01N + L GLA01L + G GLA01G + E GLA01E | Product Code (BIII): M GLA01M

Fitting Code (Bla): N GLA1NS + L GLA1LS | Mosaic Code (Bla): N GLA1NM + L GLA1LM

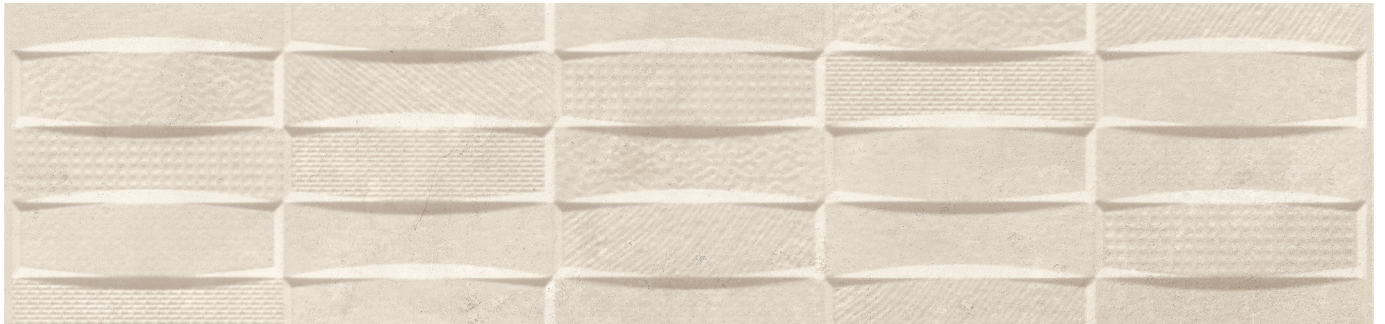

BONE - WEAVE LRV: 86

Product Code (BIII): M GLA01W



STONE PEI: IV LRV: 80

Product Code (Bla): N GLA02N + L GLA02L + G GLA02G + E GLA02E | Product Code (BIII): M GLA02M

Fitting Code (Bla): N GLA2NS + L GLA2LS | Mosaic Code (Bla): N GLA2NM + L GLA2LM



STONE - WEAVE LRV: 80

Product Code (BIII): M GLA02W

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation



SAND PEI: IV LRV: 66

Product Code (Bla): N GLA03N + L GLA03L + G GLA03G

Fitting Code (Bla): N GLA3NS + L GLA3LS | Mosaic Code (Bla): N GLA3NM + L GLA3LM



FLINT PEI: IV LRV: 55


Product Code (Bla): N GLA04N + L GLA04L + G GLA04G + E GLA04E | Product Code (BIII): M GLA04M

Fitting Code (Bla): N GLA4NS + L GLA4LS | Mosaic Code (Bla): N GLA4NM + L GLA4LM



FLINT - WEAVE LRV: 55

Product Code (BIII): M GLA04W

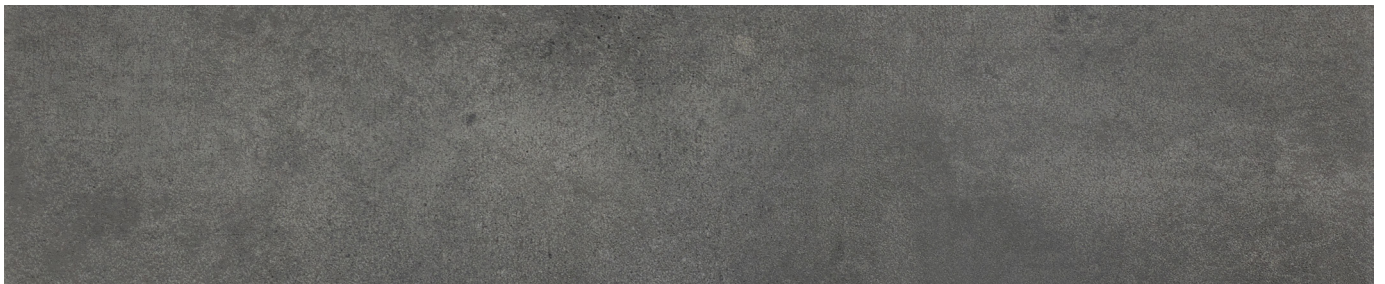


COAL PEI: IV LRV: 22

Product Code (Bla): N GLA05N + L GLA05L + G GLA05G | Product Code (BIII): M GLA05M

Fitting Code (Bla): N GLA5NS + L GLA5LS | Mosaic Code (Bla): N GLA5NM + L GLA5LM

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation

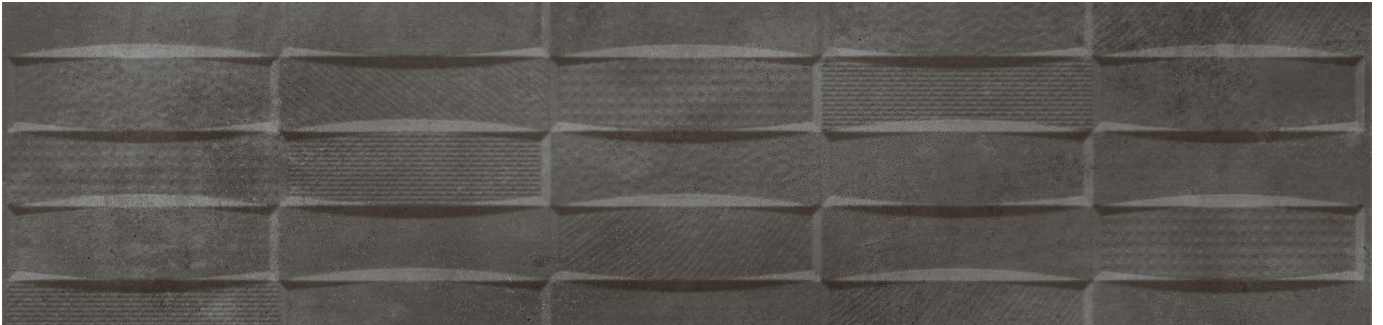

COAL - WEAVE LRV: 22

Product Code (Blil): M GLA05W



BONE, STONE AND SAND - MIX DÉCOR

Product Code (Bla): N GLA01D



FLINT AND COAL - MIX DÉCOR

Product Code (Bla): N GLA02D




Wall: Stone Natural 600x300x9.2mm - GLA02N

Wall: Bone, Stone and Sand Mix Décor Natural 600x300x9.2mm - GLA01D

Floor: Sand Natural 600x600x9.2mm - GLA03N

SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

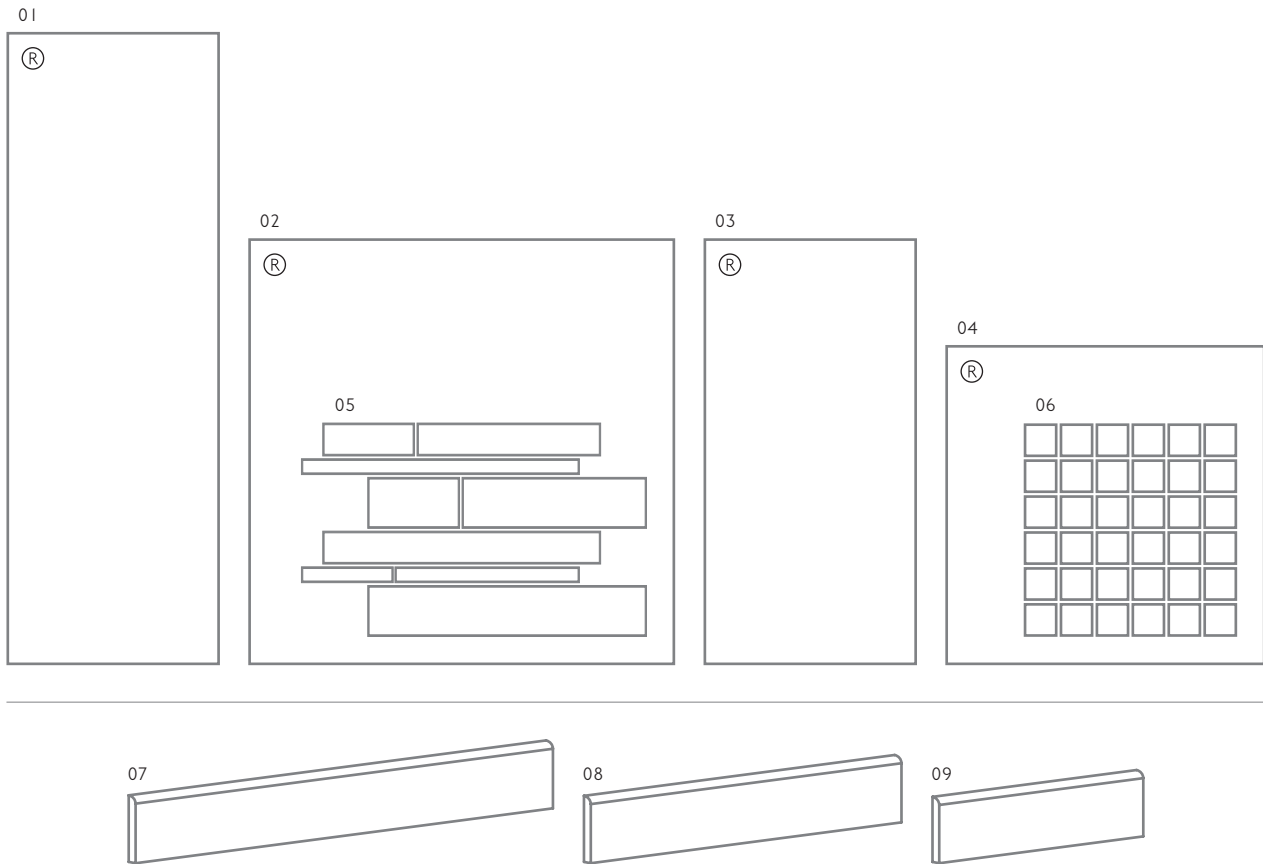

| # | Size Format | Thickness | Finish | Structure | Availability | Class | Pcs / Box | M ² / Box | Kg / Box |
|----|-------------------------|-----------|-------------|-----------|----------------------------|-------|-----------|----------------------|----------|
| 01 | 890x300mm | 10.5mm | M Matt | - | All Colours Shown | BIII | 5 Tiles | 1.32 m ² | 22.04 kg |
| | | | | Weave | All Colours Shown | BIII | 5 Tiles | 1.34 m ² | 22.04 kg |
| 02 | 600x600mm | 9.2mm | N Natural | - | All Colours Shown | Bla | 3 Tiles | 1.08 m ² | 23.03 kg |
| | | | L Lapato | - | All Colours Shown | Bla | 3 Tiles | 1.08 m ² | 23.03 kg |
| | | | G Grip | - | All Colours Shown | Bla | 3 Tiles | 1.08 m ² | 23.03 kg |
| | | 20mm | E Grip+ 2cm | - | Bone, Stone and Flint Only | Bla | 2 Tiles | 0.72 m ² | 32.02 kg |
| 03 | 600x300mm | 9.2mm | N Natural | - | All Colours Shown | Bla | 5 Tiles | 0.90 m ² | 19.26 kg |
| | | | - | - | Mix Décor Colours Only | Bla | 5 Tiles | 1.08 m ² | 23.03 kg |
| | | | L Lapato | - | All Colours Shown | Bla | 5 Tiles | 0.90 m ² | 22.36 kg |
| 04 | 450x450mm | 9.2mm | G Grip | - | All Colours Shown | Bla | 5 Tiles | 0.90 m ² | 19.26 kg |
| | | | N Natural | - | All Colours Shown | Bla | 5 Tiles | 1.02 m ² | 21.50 kg |
| | | | L Lapato | - | All Colours Shown | Bla | 5 Tiles | 1.02 m ² | 21.50 kg |
| 05 | 485x300mm Strip Mosaic | 9.2mm | N Natural | - | All Colours Shown | Bla | 6 Sheets | 0.88 m ² | 17.34 kg |
| | | | L Lapato | - | All Colours Shown | Bla | 6 Sheets | 0.88 m ² | 17.34 kg |
| 06 | 300x300mm Square Mosaic | 9.2mm | N Natural | - | All Colours Shown | Bla | 10 Sheets | 0.90 m ² | 16.80 kg |

| # | Fittings | Thickness | Finish | Structure | Availability | Class | Pcs / Box | Lm / Box | Kg / Box |
|----|-----------------------|-----------|-----------|-----------|-------------------|-------|-----------|----------|----------|
| 07 | 600x95mm R/T Skirting | 9.2mm | N Natural | - | All Colours Shown | Bla | 18 Tiles | 10.80 lm | 17.80 kg |
| | | | L Lapato | - | All Colours Shown | Bla | 18 Tiles | 10.80 lm | 17.80 kg |
| 08 | 450x95mm R/T Skirting | 9.2mm | N Natural | - | All Colours Shown | Bla | 23 Tiles | 10.35 lm | 20.00 kg |
| | | | L Lapato | - | All Colours Shown | Bla | 23 Tiles | 10.35 lm | 20.00 kg |
| 09 | 300x95mm R/T Skirting | 9.2mm | N Natural | - | All Colours Shown | Bla | 30 Tiles | 9.00 lm | 17.80 kg |
| | | | L Lapato | - | All Colours Shown | Bla | 30 Tiles | 9.00 lm | 17.80 kg |

Note: Glazed Porcelain / Bla and Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com. (R) Rectified Edge.

TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Product Specification

| Range Name | Finish | Wall Suitability | Floor Suitability | Wet Barefoot | Material / Class |
|------------|-----------|-----------------------|-----------------------|--------------|------------------------|
| Glademoor | Natural | Internal and External | Internal Only | - | Glazed Porcelain / Bla |
| | Lapato | Internal and External | Internal Only | - | Glazed Porcelain / Bla |
| | Grip | Internal and External | Internal and External | Yes | Glazed Porcelain / Bla |
| | Grip+ 2cm | - | Internal and External | Yes | Glazed Porcelain / Bla |
| | Matt | Internal Only | - | - | Glazed Ceramic / BIII |

Floor Values

| Finish | Colour | PTV (96) | PTV (55) | R Value | Wet Ramp | PEI | Traffic |
|-----------|-------------------|------------|----------|---------|----------|-----|------------|
| Natural | All Colours Shown | Wet 0 - 24 | - | - | - | IV | Commercial |
| Lapato | All Colours Shown | Wet 0 - 24 | - | - | - | IV | Commercial |
| Grip | All Colours Shown | Wet 36+ | Wet 36+ | R 11 | C | IV | Commercial |
| Grip+ 2cm | All Colours Shown | Wet 36+ | Wet 36+ | R 11 | B | IV | Commercial |

Physical Properties - Glazed Porcelain / Bla

| Test and Standard | Requirement | Result | Test and Standard | Requirement | Result |
|--|-----------------------------------|--------|--|----------------------------|---------------------------------|
| Length / Width EN ISO 10545-2 | $\pm 0.6\% \leq \pm 2\text{mm}$ | Pass | Modulus of Rupture EN ISO 10545-4 | Min. 35N / mm ² | Pass |
| Thickness EN ISO 10545-2 | $\pm 5\% \leq \pm 0.5\text{mm}$ | Pass | Thermal Shock EN ISO 10545-9 | Pass | Pass |
| Straightness of Side EN ISO 10545-2 | $\pm 0.5\% \leq \pm 1.5\text{mm}$ | Pass | Frost Resistance EN ISO 10545-12 | Resistant | Resistant |
| Rectangularity EN ISO 10545-2 | $\pm 0.5\% \leq \pm 2\text{mm}$ | Pass | Chemical Resistance EN ISO 10545-13 | Min. Class B | Pass |
| Surface Flatness EN ISO 10545-2 | $\pm 0.5\% \leq \pm 2\text{mm}$ | Pass | Stain Resistance EN ISO 10545-14 | Min. Class 3 | Pass |
| Water Absorption EN ISO 10545-3 | $\leq 0.5\%$ | Pass | Fire Rating | | Class A I FL Non Combustible |

Physical Properties - Glazed Ceramic / BIII

| Test and Standard | Requirement | Result | Test and Standard | Requirement | Result |
|--|-----------------------------------|--------|--|----------------------------|------------------------------|
| Length / Width EN ISO 10545-2 | $\pm 0.5\% \leq \pm 2\text{mm}$ | Pass | Modulus of Rupture EN ISO 10545-4 | Min. 15N / mm ² | Pass |
| Thickness EN ISO 10545-2 | $\pm 10\% \leq \pm 0.5\text{mm}$ | Pass | Thermal Shock EN ISO 10545-9 | Pass | Pass |
| Straightness of Side EN ISO 10545-2 | $\pm 0.3\% \leq \pm 1.5\text{mm}$ | Pass | Frost Resistance EN ISO 10545-12 | - | Not Suitable |
| Rectangularity EN ISO 10545-2 | $\pm 0.5\% \leq \pm 2\text{mm}$ | Pass | Chemical Resistance EN ISO 10545-13 | Min. Class B | Pass |
| Surface Flatness EN ISO 10545-2 | $\pm 0.5\% \leq \pm 2\text{mm}$ | Pass | Stain Resistance EN ISO 10545-14 | Min. Class 3 | Pass |
| Water Absorption EN ISO 10545-3 | 10% to 20% | Pass | Fire Rating | | Class A I Non Combustible |

Sustainability Credentials

| Range Name | Material / Class | EPD | Recycled Content - Tiles | Recycled Content - Packaging |
|------------|------------------------|-----|--------------------------|------------------------------|
| Glademoor | Glazed Porcelain / Bla | Yes | Up to 10% | Up to 100% (Boxes Only) |
| | Glazed Ceramic / BIII | Yes | Up to 10% | Up to 100% (Boxes Only) |

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All floor tiles shown in this literature achieve a PTV (96) Dry 36+ test result. PTV (96): Pendulum Test Value - 4S. PTV (55): Pendulum Test Value - TRL. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: technical@johnson-tiles.com.



Wall: Coal Natural 600x600x10.5mm - GLD05N
Floor: Bone Grip+ 2cm 600x600x20mm - GLD01E

WHERE TO FIND US

Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com
8:30am - 4:30pm (Monday - Friday)

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0)1782 524 111
Email: technical@johnson-tiles.com

Updated: October 2024



www.johnson-tiles.com | [f](#) [X](#) [G](#) [d](#) [P](#) [in](#) [v](#)

© 2024 Johnson Tiles Limited