


GLAZED CERAIC | WALL TILES

COLOUR STRUCTURE SHAPE ABSOLUTE



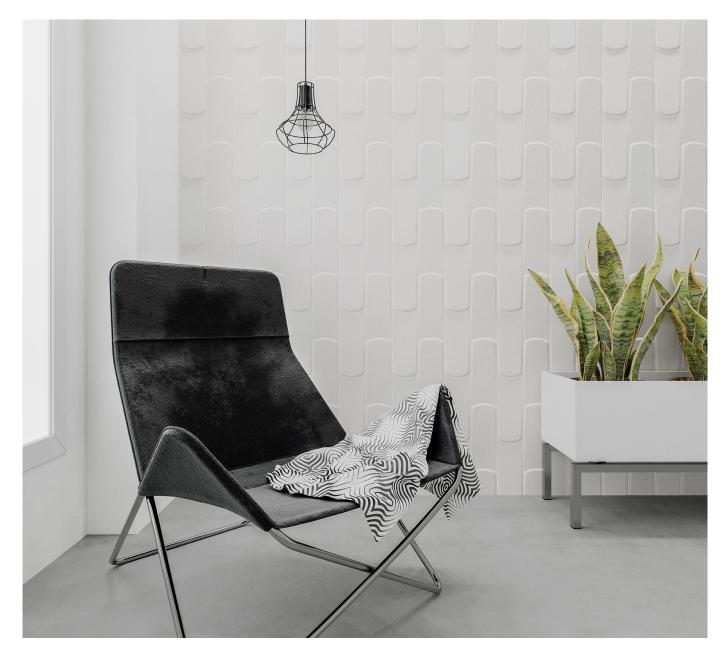


f X O J P in D www.johnson-tiles.com © 2024 Johnson Tiles Limited



# ABSTRACT


🗞 TWO COLOURS 🛛 TWO SIZES 🖓 TWO FINISHES

Not for the faint hearted, Abstract is perfect for making a bold statement to bring character and personality to any space. Roaming from the powerful to the playful, this range offers a striking selection of colour options, including White and a Pastel Mix of fifteen softer hues. Coupled with the daring shapes of the 200x200mm Chevron and 250x100mm Droplet, this special-order range is ideal to create a stunning feature wall or highlight a splash back.

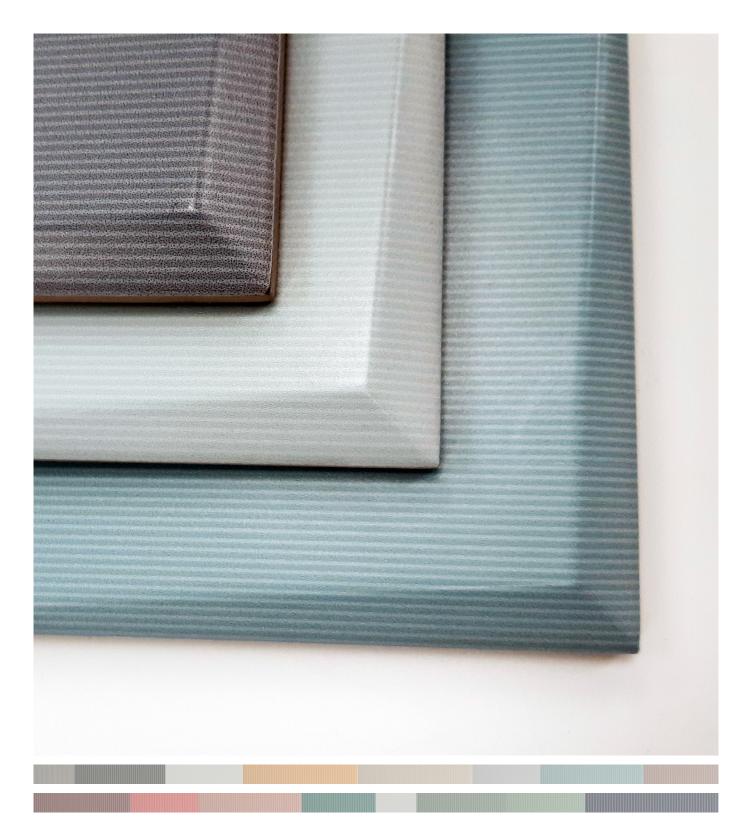





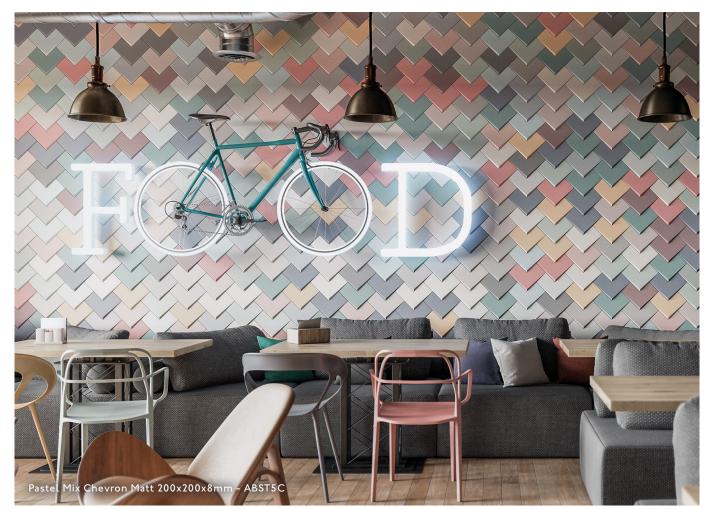

# COLOURS AND PRODUCT CODES

VI: Low Shade Variation



WHITE - DROPLET LRV: 81

Product Code: M ABSTID



## **PASTEL MIX** - DROPLET

Product Code: M ABST5D

Note: Each box of Pastel Mix - Droplet ABST5D contains a random mix of all fifiteen colour/design options shown above.

## WHITE - CHEVRON LRV: 81

Product Code: M ABSTIC




## PASTEL MIX - CHEVRON

Product Code: M ABST5C

Note: Each box of Pastel Mix - Chevron ABST5C contains a random mix of all fifiteen colour/design options shown above.

# SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

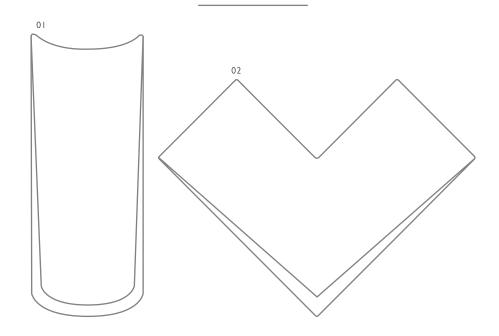

#	Size Format	Thickness	Finish	Structure	Availability	Class	Pcs / Box	M² / Box	Kg / Box
01	250x100mm	8mm	M Matt	Droplet	White and Pastel Mix Only	BIII	24 Tiles	0.63 m²	9.77 kg
01	2302100000	011111	E Metallic	Droplet	Steel Only	BIII	24 Tiles	0.63 m²	9.77 kg
0.2	200x200mm	0	M Matt	Chevron	White and Pastel Mix Only	BIII	23 Tiles	0.69 m²	10.71 kg
02	200x200mm	8mm	E Metallic	Chevron	Steel Only	BIII	23 Tiles	0.69 m²	10.71 kg

Note: Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.



## **TECHNICAL SUPPORT**

## Specification, Sustainability and Important Information

#### **Product Specification**

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Abstract	M Matt	Internal Only	-	-	Glazed Ceramic / BIII
Abstract	E Metallic	Internal Only	-	-	Glazed Ceramic / BIII

#### Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
Length / Width EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Modulus of Rupture EN ISO 10545-4	Min. 15N / mm²	Pass
→ Thickness ► IN ISO 10545-2	± 10% ≤ ± 0.5mm	Pass	Thermal Shock EN ISO 10545-9	Pass	Pass
Straightness of Side EN ISO 10545-2	± 0.3% ≤ ± 1.5mm	Pass	Frost Resistance EN ISO   0545-12	-	Not Suitable
Rectangularity EN ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
→ Surface Flatness ►N ISO 10545-2	± 0.5% ≤ ± 2mm	Pass	Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
Water Absorption EN ISO 10545-3	10% to 20%	Pass	Fire Rating		Class A I Non Combustible

#### Sustainability Credentials

Abstract Glazed Ceramic / BIII Yes Up to 80%	-

**Note:** Please contact our technical helpline, or visit our website for specification and installation advice. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

### Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0) 1782 524 | | | or email: technical@johnson-tiles.com.

## WHERE TO FIND US

#### Head Office

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ, United Kingdom

Tel: +44 (0) I 782 575 575 Email: info@johnson-tiles.com www.johnson-tiles.com

#### Material Lab Studio

10 Great Titchfield Street, London, WIW 8BB, United Kingdom

Tel: +44 (0)20 7436 8629 Email: info@material-lab.co.uk www.material-lab.co.uk

#### Factory Outlet

Tel: +44 (0)1782 524 040 Email: foutlet@johnson-tiles.com www.outlet.johnson-tiles.com

#### **Customer Services**

Tel: +44 (0) 1782 524 000 Email: sales@johnson-tiles.com 8:30am - 4:30pm (Monday - Friday)

Order A Sample Tel: +44 (0)1782 524 043 Email: samples@johnson-tiles.com

Technical Advice Helpline Tel: +44 (0)1782 524 111 Email: technical@johnson-tiles.com

Updated: October 2024

