

# YARRA

GLAZED PORCELAIN | FLOOR AND WALL TILES

STONE MOSAIC ABSOLUTE



[www.johnson-tiles.com](http://www.johnson-tiles.com)

© 2024-25 Johnson Tiles Limited

Est. 1901  
**JOHNSON  
TILES**

# YARRA



**FOUR COLOURS**




**FIVE SIZES**



**TWO FINISHES**

Featuring mineral vein detailing imitating natural marble, the Yarra range of sumptuous stone-effect floor and wall tiles bring depth and character to any interior space. This collection of glazed porcelain products is suitable for both internal and external settings, in a versatile, neutral colour palette of Ivory, Pebble, Silver and Carbon. It boasts four rectified large format sizes from 600x300mm up to 1186x592mm and two finishes: Natural or Grip. Yarra provides the complete tiling solution with a 300x300mm square mosaic option and co-ordinating fittings also available.





## COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation

---



### IVORY PEI: IV LRV: 53

Product Code: N YAR01N + G YAR01G | Mosaic Code: N YAR1NM | Fitting Code: N YAR1NS



### PEBBLE PEI: IV LRV: 42

Product Code: N YAR02N + G YAR02G | Mosaic Code: N YAR2NM | Fitting Code: N YAR2NS

## COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation

---



### SILVER PEI: IV LRV: 32

Product Code: N YAR03N + G YAR03G | Mosaic Code: N YAR3NM | Fitting Code: N YAR3NS




### CARBON PEI: III LRV: 15

Product Code: N YAR04N + G YAR04G | Mosaic Code: N YAR4NM | Fitting Code: N YAR4NS

# SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

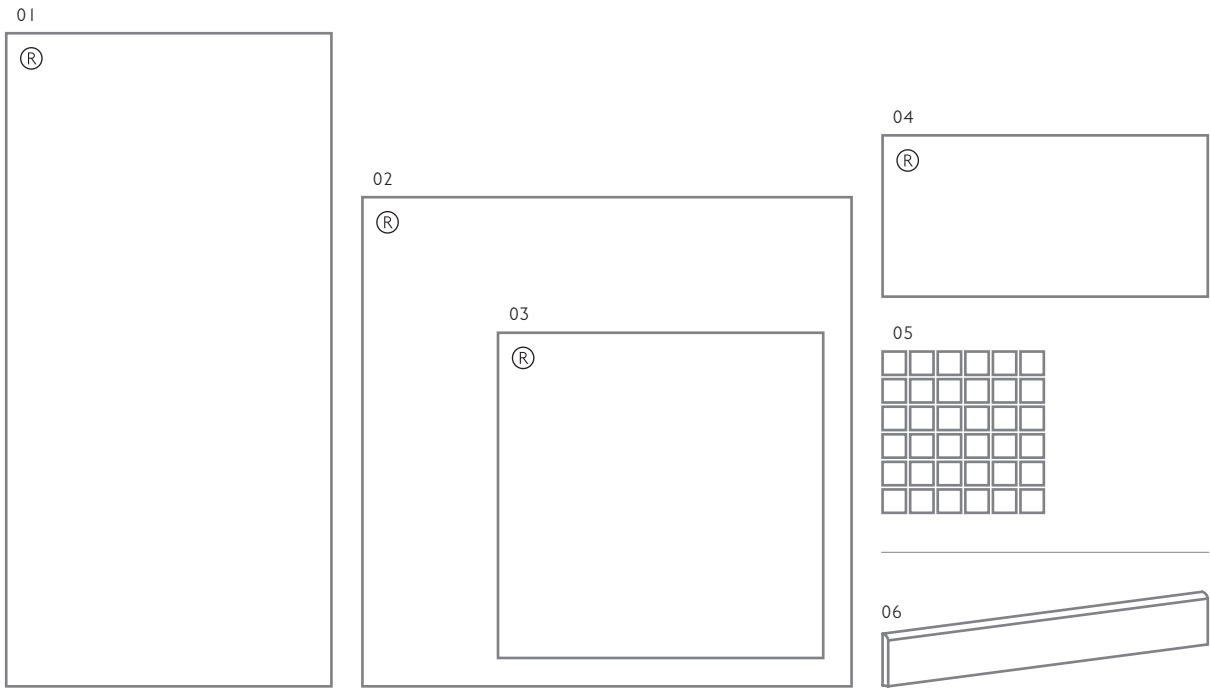

#	Size Format	Thickness	Finish	Availability	Class	Pcs / Box	M <sup>2</sup> / Box	Kg / Box
01	1186x592mm	10.5mm	Natural	All Colours Shown	Bla	1 Tile	0.71 m <sup>2</sup>	17.14 kg
02	889x889mm	10.5mm	Natural	All Colours Shown	Bla	1 Tile	0.79 m <sup>2</sup>	19.40 kg
03	600x600mm	9.2mm	Natural	All Colours Shown	Bla	3 Tiles	1.07 m <sup>2</sup>	22.79 kg
			Grip	All Colours Shown	Bla	3 Tiles	1.07 m <sup>2</sup>	24.00 kg
04	600x300mm	9.2mm	Natural	All Colours Shown	Bla	6 Tiles	1.06 m <sup>2</sup>	22.37 kg
			Grip	All Colours Shown	Bla	5 Tiles	0.89 m <sup>2</sup>	20.00 kg
05	300x300mm Square Mosaic	9.2mm	Natural	All Colours Shown	Bla	10 Sheets	0.90 m <sup>2</sup>	16.80 kg

#	Fittings	Thickness	Finish	Availability	Class	Pcs / Box	Lm / Box	Kg / Box
06	600x95mm R/T Skirting	9.2mm	Natural	All Colours Shown	Bla	20 Tiles	12.00 Lm	23.94 kg

Note: Glazed Porcelain / Bla tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com). (R) Rectified.





Carbon Natural 600x600x9.2mm - YAR40N



# TECHNICAL SUPPORT

Specification, Sustainability and Important Information













## Product Specification

Range Name	Finish	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Yarra	 Natural	Internal and External	Internal Only	-	Glazed Porcelain / Bla
	 Grip	Internal and External	Internal and External	Yes	Glazed Porcelain / Bla

## Floor Values

Finish	Colour	PTV (96)	PTV (55)	R Value	Wet Ramp	PEI	Traffic
 Natural	Carbon Only	Wet 25 - 35	-	R10	A	III	Light Commercial
	All Other Colours	Wet 25 - 35	-	R10	A	IV	Commercial
 Grip	Carbon Only	Wet 36+	Wet 36+	R11	C	III	Light Commercial
	All Other Colours	Wet 36+	Wet 36+	R10	C	IV	Commercial

## Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 35N / mm <sup>2</sup>	Pass
 Thickness EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	Resistant	Resistant
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	$\leq 0.5\%$	Pass	 Fire Rating		Class A1 FL Non Combustible

## Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Yarra	Glazed Porcelain / Bla	Yes	Up to 10%	Up to 100% (Boxes Only)

**Note:** Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All floor tiles shown in this literature achieve a PTV (96) Dry 36+ test result. PTV (96): Pendulum Test Value - 4S. PTV (55): Pendulum Test Value - TRL. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

## Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com)

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: [technical@johnson-tiles.com](mailto:technical@johnson-tiles.com).

## WHERE TO FIND US

### Head Office

Harewood Street, Tunstall,  
Stoke on Trent, Staffordshire,  
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)  
[www.johnson-tiles.com](http://www.johnson-tiles.com)

---

### Material Lab Studio

10 Great Titchfield Street,  
London, W1W 8BB,  
United Kingdom

Tel: +44 (0)20 7436 8629  
Email: [info@material-lab.co.uk](mailto:info@material-lab.co.uk)  
[www.material-lab.co.uk](http://www.material-lab.co.uk)

---

### Factory Outlet

Tel: +44 (0)1782 524 040  
Email: [foutlet@johnson-tiles.com](mailto:foutlet@johnson-tiles.com)  
[www.outlet.johnson-tiles.com](http://www.outlet.johnson-tiles.com)

---

### Customer Services

Tel: +44 (0)1782 524 000  
Email: [sales@johnson-tiles.com](mailto:sales@johnson-tiles.com)  
8:30am - 4:30pm (Monday - Friday)

---

### Order A Sample

Tel: +44 (0)1782 524 043  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

### Technical Advice Helpline

Tel: +44 (0)1782 524 111  
Email: [technical@johnson-tiles.com](mailto:technical@johnson-tiles.com)

---

Updated: February 2025



[www.johnson-tiles.com](http://www.johnson-tiles.com) | [f](#) [X](#) [G](#) [d](#) [P](#) [in](#) [v](#)

© 2024-25 Johnson Tiles Limited