

# LAURA ASHLEY

GLAZED CERAMIC AND PORCELAIN | WALL AND FLOOR TILES

COLOUR PATTERN LAURA ASHLEY



f X @ d p in v

[www.johnson-tiles.com](http://www.johnson-tiles.com)

© 2024 Johnson Tiles Limited

Est. 1901  
**JOHNSON  
TILES**

# LAURA ASHLEY

 **NINE COLOURS**

 **TWO SIZES**

 **TWO FINISHES**

With 70 years of design excellence, Laura Ashley is one of the world's best-loved home and lifestyle brands. Its journey can be traced back to 1953, when Laura and Bernard Ashley began hand-printing fabric at their kitchen table in their tiny flat in Pimlico after being inspired by a Women's Institute exhibition at the V&A museum. Founded on a rich design heritage and on traditional values of quality and originality, the Laura Ashley brand has been nurtured to become synonymous with beauty and design. Our style is constantly evolving to remain distinctive and inspirational, evoking the alluring beauty of the British countryside and a timeless mood of peace and serenity. The beautiful Laura Ashley Glazed Ceramic Wall and Glazed Porcelain Floor Tiles Collection featured include geometric designs and an elongated size format, capturing a timeless elegance for any space, inspired by the heritage of the Laura Ashley archive. Our Tiles beautifully complement the Laura Ashley Paints and Wallpaper ranges for a tactile contrast.







Mason Pearl Gloss 245x75x8mm - LAMA1A




Mr Jones Seaspray Matt 300x300x8.3mm - LAMJ1A

# COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

---

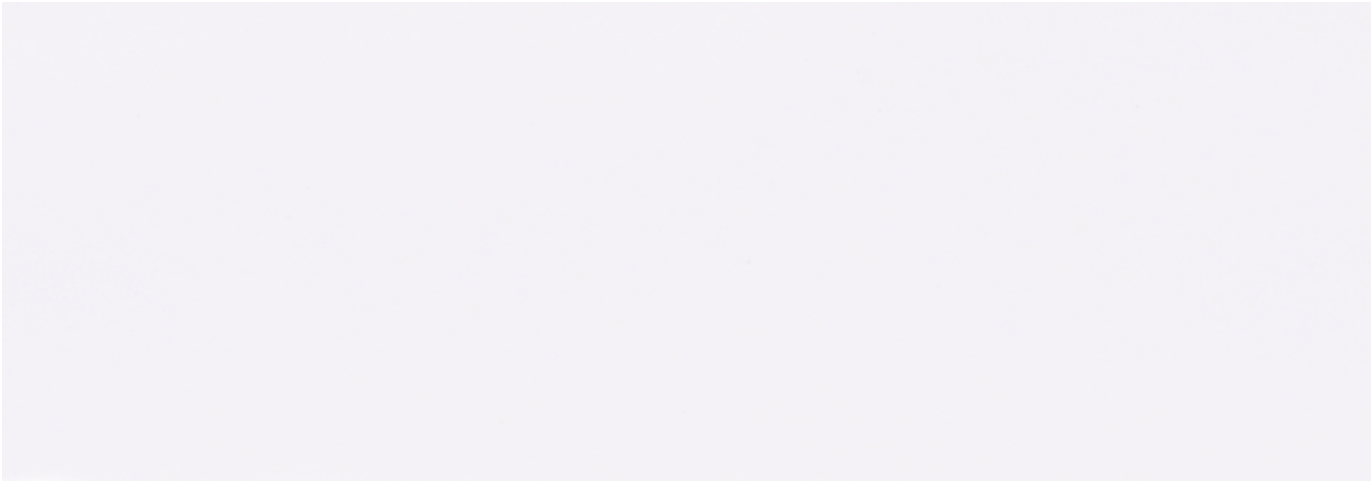


**MASON - PEARL** LRV: 83

Product Code (BIII): G LAMA1A



**MASON - PALE DOVE** LRV: 64

Product Code (BIII): G LAMA2A

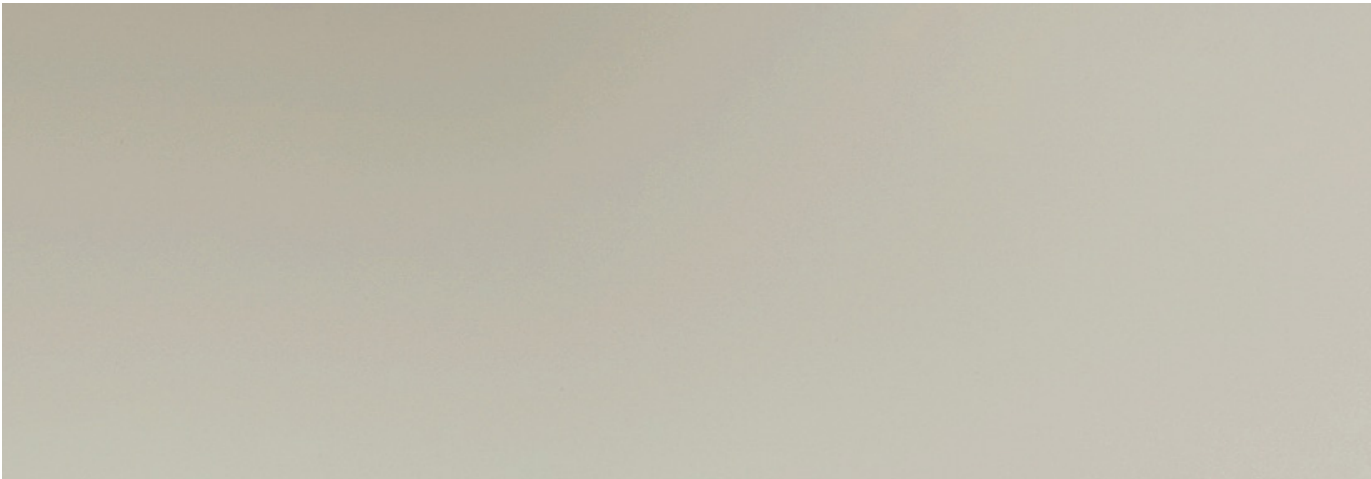


**MASON - TWINE** LRV: 54

Product Code (BIII): G LAMA4A

## COLOURS AND PRODUCT CODES

V2: Low to Moderate Shade Variation

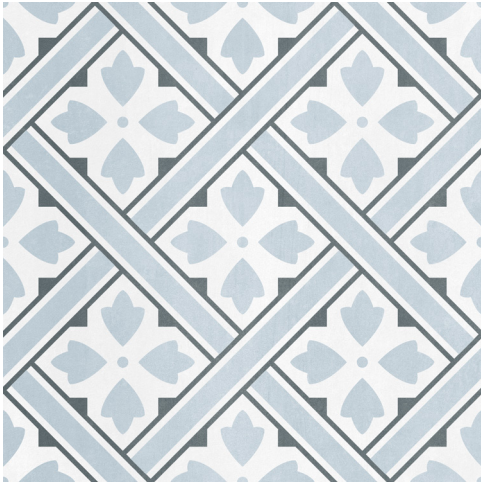


**MR JONES - SEASPRAY** PEI: IV

Product Code (Bla): M LAMJ1A



**WICKER - EAU DE NIL** PEI: IV

Product Code (Bla): M LAWK1A

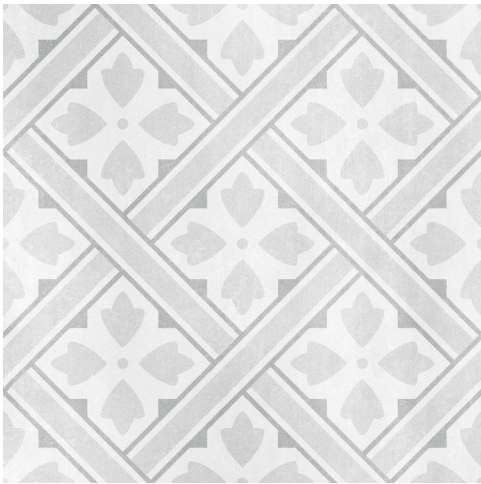


**MR JONES - SILVER** PEI: IV

Product Code (Bla): M LAMJ2A



**WICKER - STEEL** PEI: IV

Product Code (Bla): M LAWK2A

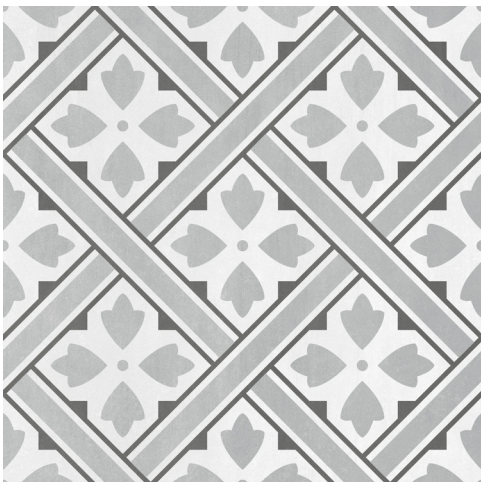

**MR JONES - STEEL** PEI: IV

Product Code (Bla): M LAMJ3A



**WICKER - TWINE** PEI: IV

Product Code (Bla): M LAWK3A

## SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information



#	Size Format	Thickness	Finish	Structure	Availability	Class	Pcs / Box	M <sup>2</sup> / Box	Kg / Box
01	245x75mm	8mm	Gloss	-	All Colours Shown	BIII	54 Tiles	0.99 m <sup>2</sup>	16.00 kg
02	300x300mm	8.3mm	Matt	-	All Colours Shown	Bla	13 Tiles	1.17 m <sup>2</sup>	21.56 kg

Note: Glazed Ceramic / BIII and Glazed Porcelain / Bla tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com).





Wall: Mason Pearl Gloss 245x75x8mm - LAMA1A  
 Floor: Mr Jones Silver Matt 300x300x8.3mm - LAMJ2A

# TECHNICAL SUPPORT

Specification, Sustainability and Important Information














## Product Specification

Range Name	Finish	Structure	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Laura Ashley	 Gloss	-	Internal Only	-	-	Glazed Ceramic / BIII
	 Matt	-	Internal and External	Internal Only	-	Glazed Porcelain / Bla














## Floor Values

Finish	Structure	Colour	PTV (96)	PTV (55)	R Value	Wet Ramp	PEI	Traffic
 Matt	-	All Colours Shown	Wet 0 - 24	-	-	-	IV	Commercial

## Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 15N / mm <sup>2</sup>	Pass
 Thickness EN ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	-	Not Suitable
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	10% to 20%	Pass	 Fire Rating		Class A I Non Combustible
 Weight / M <sup>2</sup>	16.17 kg 8mm Thick				

## Physical Properties - Glazed Porcelain / Bla

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 35N / mm <sup>2</sup>	Pass
 Thickness EN ISO 10545-2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	Resistant	Resistant
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Pass
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Pass
 Water Absorption EN ISO 10545-3	$\leq 0.5\%$	Pass	 Fire Rating		Class A I FL Non Combustible
 Weight / M <sup>2</sup>	18.43 kg 8.3mm Thick				

## Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Laura Ashley	Glazed Ceramic / BIII	-	Up to 40%	Up to 100% (All Packaging)
	Glazed Porcelain / Bla	Yes	Up to 20%	Up to 100% (Boxes Only)

**Note:** Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. Please contact our technical helpline, or visit our website for specification and installation advice. All floor tiles shown in this literature achieve a PTV (96) Dry 36+ test result. PTV (96): Pendulum Test Value - 4S. PTV (55): Pendulum Test Value - TRL. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute. EPD: Environmental Product Declaration. CSV: Colour Shade Variation.



# TECHNICAL SUPPORT

Specification, Sustainability and Important Information

## Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - [www.johnson-tiles.com](http://www.johnson-tiles.com)

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: [ddunlop@johnson-tiles.com](mailto:ddunlop@johnson-tiles.com).



Wall: Mason Pale Dove Gloss 245x75x8mm - LAMA2A  
Floor: Wicker Eau De Nil Matt 300x300x8.3mm - LAMJ1A

## WHERE TO FIND US

### Head Office

Harewood Street, Tunstall,  
Stoke on Trent, Staffordshire,  
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)  
[www.johnson-tiles.com](http://www.johnson-tiles.com)

---

### Material Lab Studio

10 Great Titchfield Street,  
London, W1W 8BB,  
United Kingdom

Tel: +44 (0)20 7436 8629  
Email: [info@material-lab.co.uk](mailto:info@material-lab.co.uk)  
[www.material-lab.co.uk](http://www.material-lab.co.uk)

---

### Factory Outlet

Tel: +44 (0)1782 524 040  
Email: [foutlet@johnson-tiles.com](mailto:foutlet@johnson-tiles.com)  
[www.outlet.johnson-tiles.com](http://www.outlet.johnson-tiles.com)

---

### Customer Services

Tel: +44 (0)1782 524 000  
Email: [sales@johnson-tiles.com](mailto:sales@johnson-tiles.com)  
8:30am - 5:00pm (Monday - Friday)

---

### Order A Sample

Tel: +44 (0)1782 524 043  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

### Technical Advice Helpline

Tel: +44 (0)1782 524 111  
Email: [ddunlop@johnson-tiles.com](mailto:ddunlop@johnson-tiles.com)

---

Launched: September 2024



[www.johnson-tiles.com](http://www.johnson-tiles.com) | [f](#) [X](#) [G](#) [d](#) [P](#) [in](#) [v](#)

© 2024 Johnson Tiles Limited