

LIGNE

GLAZED CERAMIC | WALL TILES

COLOUR STRUCTURE ABSOLUTE



www.johnson-tiles.com

© 2024 Johnson Tiles Limited

Est. 1901
**JOHNSON
TILES**

LIGNE



EIGHT COLOURS




TWO SIZES



ONE FINISH

Ligne is a characterful glazed ceramic wall tile range, ideal for both commercial and residential design projects. Available in two slim format sizes - 125x40mm and the highly popular 250x125mm strips - Ligne draws inspiration from the fusion of colour splashes and the rhythmic harmony of musical notes. Featuring a sophisticated gloss finish across eight eclectic colour options, ranging from soft pastels like Ash, Kiwi, and Violet to vibrant hues like Rosemist, Fennel, and Indigo, this collection is perfect for crafting a chromatic masterpiece that resonates with any design style.

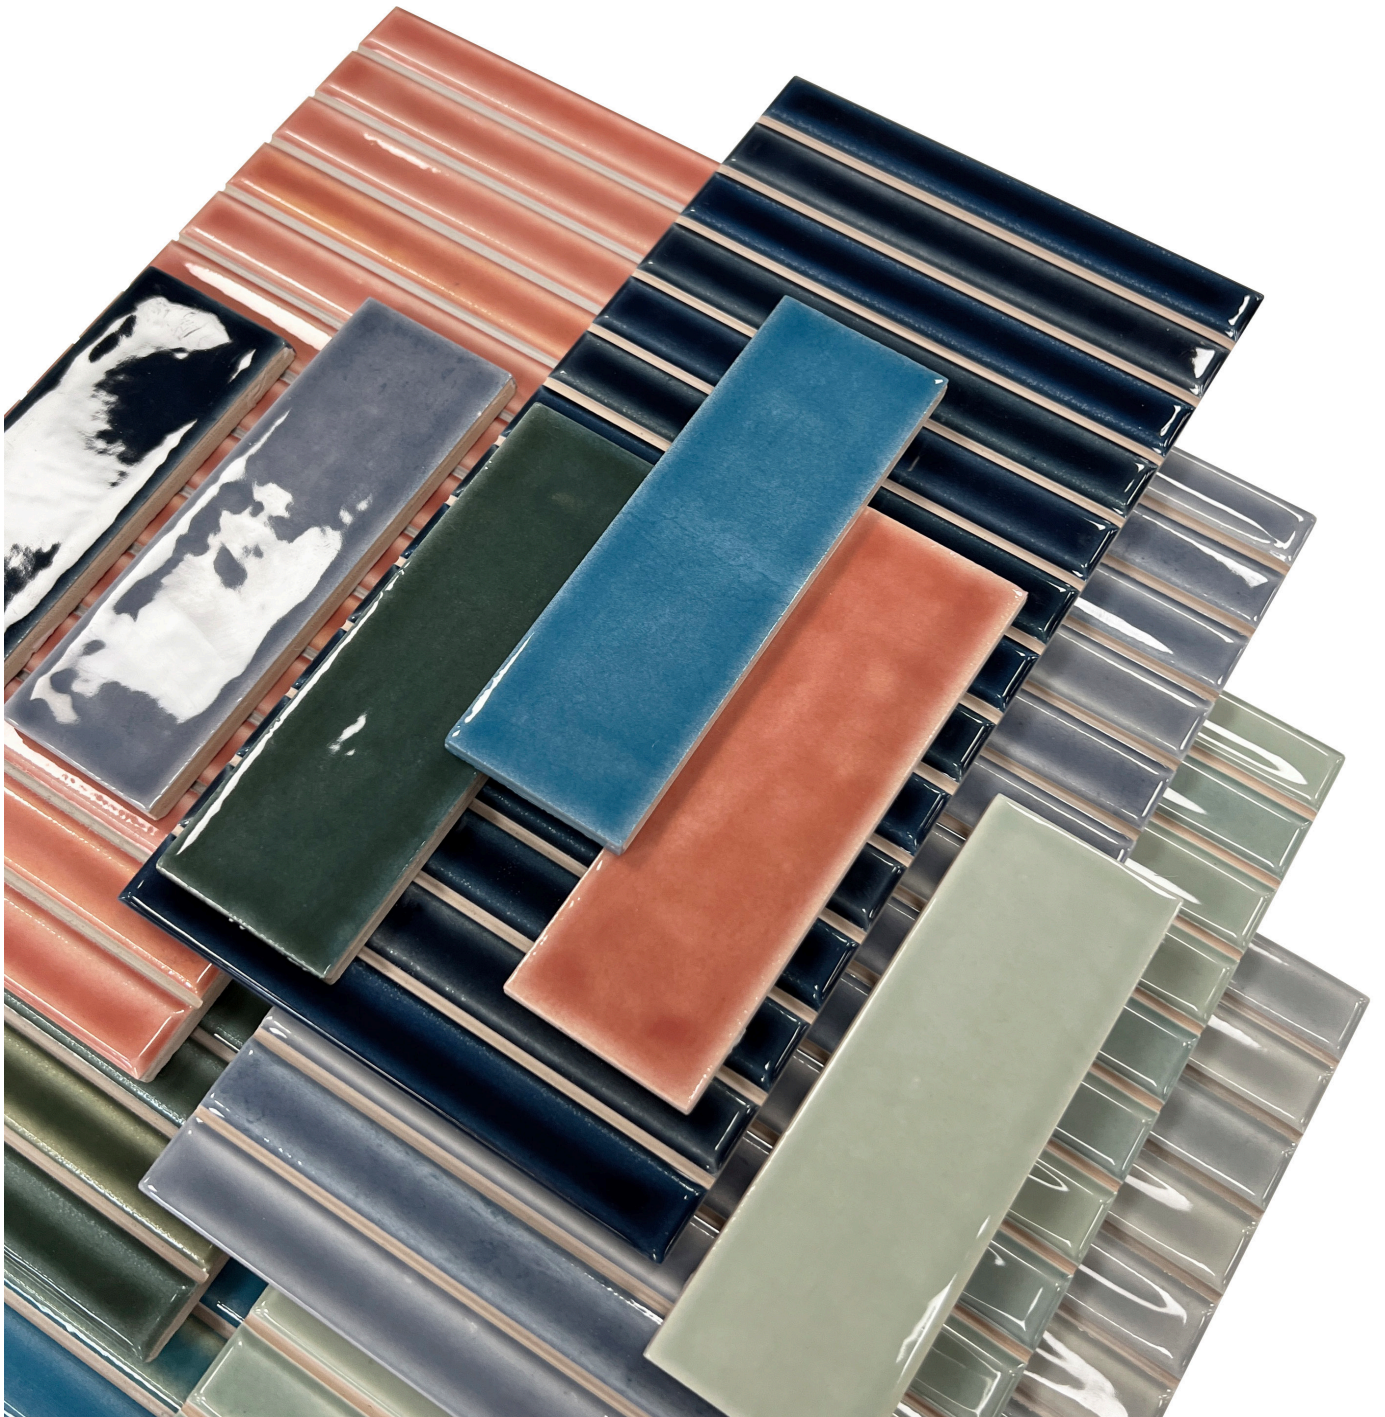



Fennel Gloss 125x40x8.5mm - LIG06A



Violet Strips Gloss 250x125x10.5mm - LIG04D



Ivory Gloss 125x40x8.5mm - LIG01A
Ivory Strips Gloss 250x125x10.5mm - LIG01D



Rosemist Gloss 125x40x8.5mm - LIG07A



Turquoise Gloss 125x40x8.5mm - LIG05A
Turquoise Strips Gloss 250x125x10.5mm - LIG05D

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation



IVORY LRV: 65

Product Code: G LIG01A



IVORY - STRIPS LRV: 65

Product Code: G LIG01D



ASH LRV: 39

Product Code: G LIG02A




ASH - STRIPS LRV: 39

Product Code: G LIG02D

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation

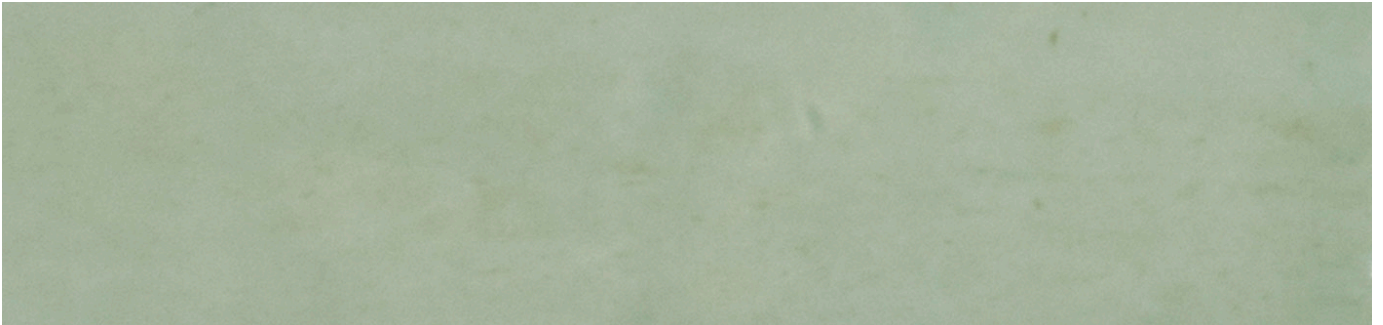

KIWI LRV: 53

Product Code:  LIG03A



KIWI - STRIPS LRV: 53

Product Code:  LIG03D



VIOLET LRV: 22

Product Code:  LIG04A



VIOLET - STRIPS LRV: 22

Product Code:  LIG04D

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation



TURQUOISE LRV: 19

Product Code:  LIG05A




TURQUOISE - STRIPS LRV: 19

Product Code:  LIG05D



FENNEL LRV: 11

Product Code:  LIG06A

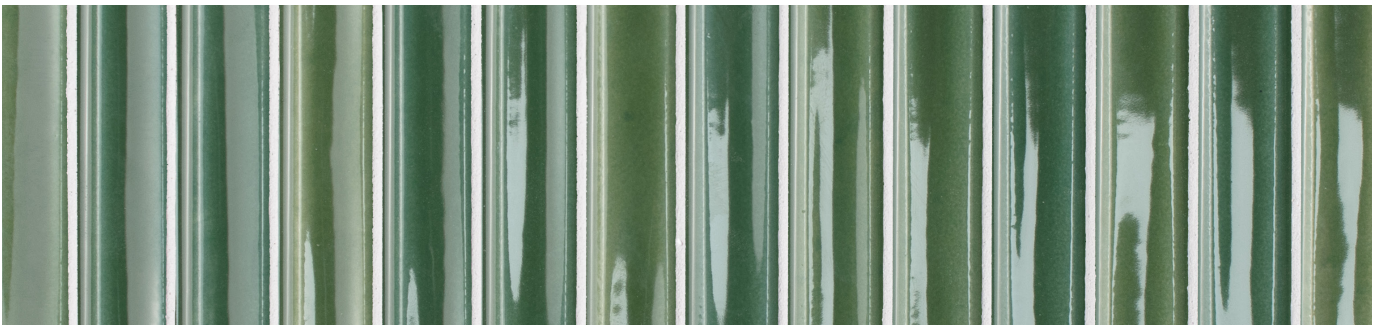

FENNEL - STRIPS LRV: 11

Product Code:  LIG06D

COLOURS AND PRODUCT CODES

V3: Moderate to High Shade Variation



ROSEMIST LRV: 22

Product Code:  LIG07A




ROSEMIST - STRIPS LRV: 22

Product Code:  LIG07D



INDIGO LRV: 06

Product Code:  LIG08A

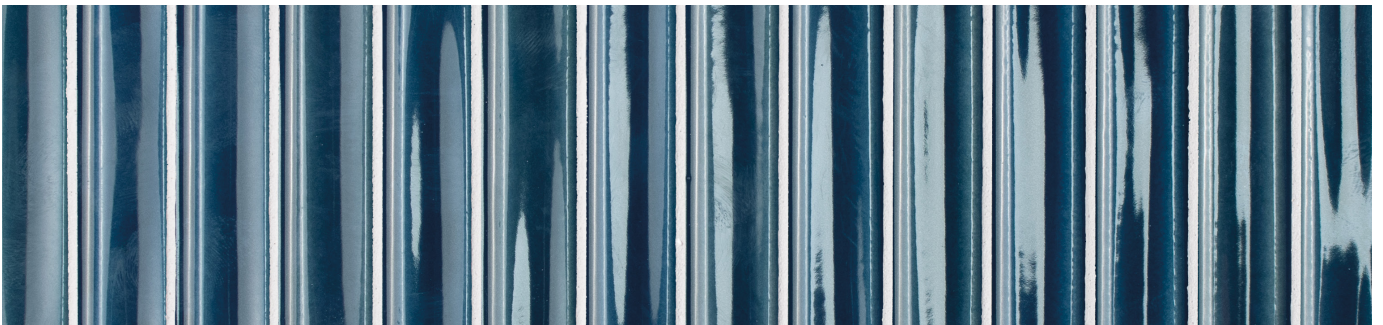


INDIGO - STRIPS LRV: 06

Product Code:  LIG08D

SIZE FORMATS AND AVAILABILITY

Size Options and Packing Information

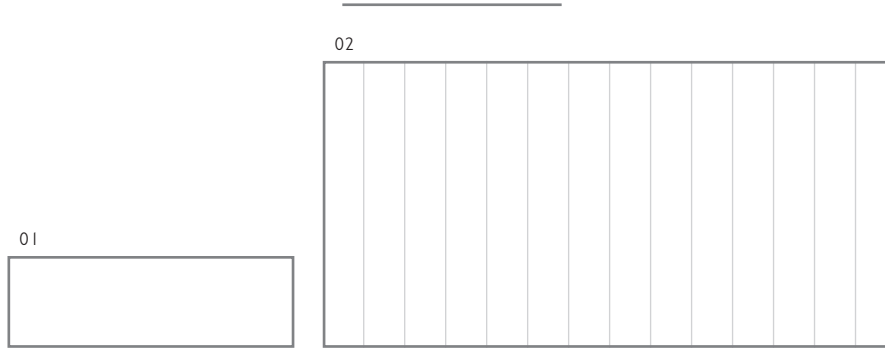

#	Size Format	Thickness	Finish	Structure	Availability	Class	Pcs / Box	M ² / Box	Kg / Box
01	125x40mm	8.5mm	Gloss	-	All Colours Shown	BIII	114 Tiles	0.57 m ²	7.80 kg
02	250x125mm	10.5mm	Gloss	Strips	All Colours Shown	BIII	14 Tiles	0.43 m ²	7.25 kg

Note: Glazed Ceramic / BIII tiles. For more information please see the suitability advice given in the technical section. All sizes indicated are metric modular. All sizes shown are nominal. For the most up-to-date size, colour and finish availability, please visit our website - www.johnson-tiles.com.



Kiwi Gloss 125x40x8.5mm - LIG03A
 Kiwi Strips Gloss 250x125x10.5mm - LIG03D














TECHNICAL SUPPORT

Specification, Sustainability and Important Information

Product Specification

Range Name	Finish	Structure	Wall Suitability	Floor Suitability	Wet Barefoot	Material / Class
Ligne	Gloss	-	Internal Only	-	-	Glazed Ceramic / BIII
		Strips	Internal Only	-	-	Glazed Ceramic / BIII

Physical Properties - Glazed Ceramic / BIII

Test and Standard	Requirement	Result	Test and Standard	Requirement	Result
 Length / Width EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Modulus of Rupture EN ISO 10545-4	Min. 15N / mm ²	Pass
 Thickness EN ISO 10545-2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass	 Thermal Shock EN ISO 10545-9	Pass	Pass
 Straightness of Side EN ISO 10545-2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass	 Frost Resistance EN ISO 10545-12	-	Not Suitable
 Rectangularity EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Chemical Resistance EN ISO 10545-13	Min. Class B	Class A
 Surface Flatness EN ISO 10545-2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 Stain Resistance EN ISO 10545-14	Min. Class 3	Class 5
 Water Absorption EN ISO 10545-3	10% to 20%	> 10%	 Fire Rating		Class A1 Non Combustible
 Weight / M²	13.69 kg 8.5mm Thick	16.87 kg 10.5mm Thick			

Sustainability Credentials

Range Name	Material / Class	EPD	Recycled Content - Tiles	Recycled Content - Packaging
Ligne	Glazed Ceramic / BIII	Yes	Up to 60%	Up to 100% (Boxes Only)

Note: Please contact our technical helpline, or visit our website for specification and installation advice.
EPD: Environmental Product Declaration. CSV: Colour Shade Variation.

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour and patterning are acceptable.

The tiles shown in this literature are quality products and conform to BS EN 14411 as shown in the physical properties listed above.

For a comprehensive colour, size, finish and availability overview along with full technical and sustainability information for all products shown, please visit our website - www.johnson-tiles.com

- All sizes listed are metric modular.
- For specific suitability details, please contact our technical advice helpline or use the email address provided.
- Johnson Tiles Limited cannot accept responsibility for any tiles that have already been fixed.
- Johnson Tiles Limited reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

All product technical values quoted in this literature are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles Limited are British Standard registered. To find out more, please contact our technical advice helpline on +44 (0)1782 524 111 or email: ddunlop@johnson-tiles.com.

WHERE TO FIND US

Head Office

Harewood Street, Tunstall,
Stoke on Trent, Staffordshire,
ST6 5JZ, United Kingdom

Tel: +44 (0)1782 575 575
Email: info@johnson-tiles.com
www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street,
London, W1W 8BB,
United Kingdom

Tel: +44 (0)20 7436 8629
Email: info@material-lab.co.uk
www.material-lab.co.uk

Factory Outlet

Tel: +44 (0)1782 524 040
Email: foutlet@johnson-tiles.com
www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0)1782 524 000
Email: sales@johnson-tiles.com
8:30am - 5:00pm (Monday - Friday)

Order A Sample

Tel: +44 (0)1782 524 043
Email: samples@johnson-tiles.com

Technical Advice Helpline

Tel: +44 (0)1782 524 111
Email: ddunlop@johnson-tiles.com

Launched: September 2024



www.johnson-tiles.com | [f](#) [X](#) [G](#) [d](#) [P](#) [in](#) [v](#)

© 2024 Johnson Tiles Limited